

PIRANHAFLEX™ SAE 100R7 TWIN LINE HYDRAULIC HOSE

PIRANHAFLEX™ SERIES PF354TL AND PF354NCTL (FOR NON-CONDUCTIVE APPLICATIONS) ARE A BONDED TWIN LINE THERMOPLASTIC HYDRAULIC HOSE PRODUCT IDEAL FOR MEDIUM PRESSURE APPLICATIONS INVOLVING HYDRAULIC OIL AND LUBRICATIONS LINES.



Construction:

Piranhaflex™ Series **PF354** & **PF354NC** consist of three individual components bonded to ensure maximum performance.

Tube – Seamless nylon inner tube.


Reinforcement – Braided high tensile strength fiber reinforcement.

Cover – Series **PF354** has a **black** abrasion resistant polyurethane pin pricked cover; **Series PF354NC** has an **Orange non-conductive (REACH Compliant), non-pin pricked cover.**

Temperature Range: -40°F (-40°C) to +200°F (+93°C) for petroleum based hydraulic fluids.

Features:

- Meets or exceeds SAE J517 Standards
- Tested at ½ bend radius under SAE Standards
- Exceeds 100R7 impulse requirements
- Light weight and flexible
- Ideal for general hydraulic services

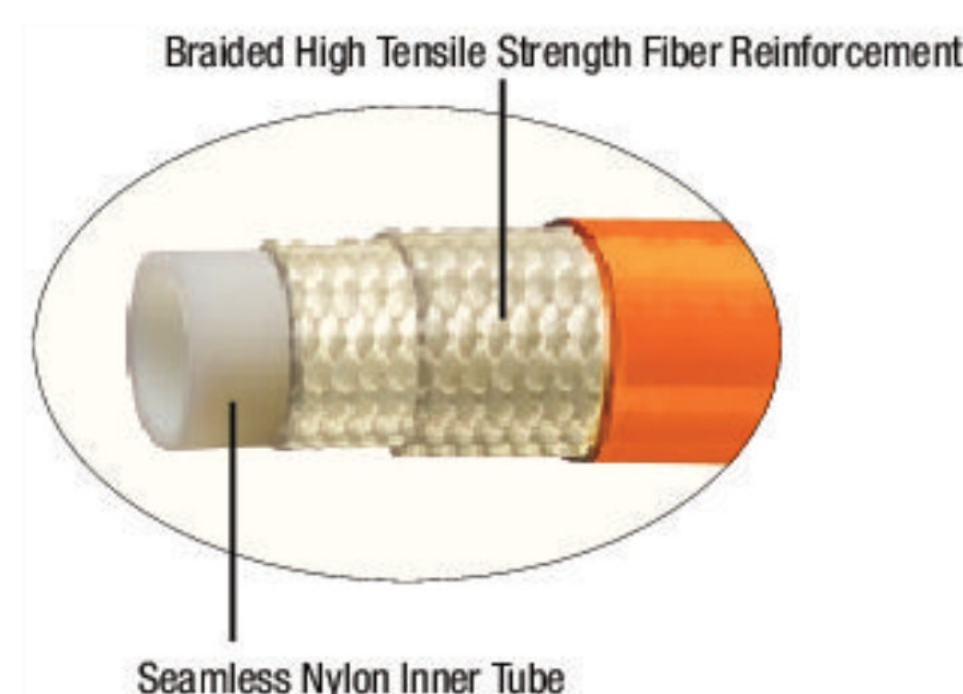

| Part Number | Approx. Wt. lbs./ft. |
|-------------------|----------------------|
| PF354TL-04-250R | 0.10 |
| PF354TL-06-250R | 0.20 |
| PF354TL-08-250R | 0.32 |
| PF354NCTL-04-250R | 0.10 |
| PF354NCTL-06-250R | 0.20 |
| PF354NCTL-08-250R | 0.32 |

GEORGIA
3400 Town Point Dr.
Suite 130
Kennesaw, GA 30144

OHIO
2611 Thunderhawk Ct.
Dayton, OH 45414

(800) 344-0150 phone
(937) 454-2086 fax
sales@ushoseco.com
www.USHOSECO.com

THE THERMOPLASTIC