


300 PSI BLACK FUEL & OIL HOSE

THE T620AA SERIES IS A 300 PSI FUEL AND OIL SUCTION AND DISCHARGE HOSE FOR UP TO 50% AROMATIC CONTENT. DESIGNED FOR HEAVY DUTY APPLICATIONS.

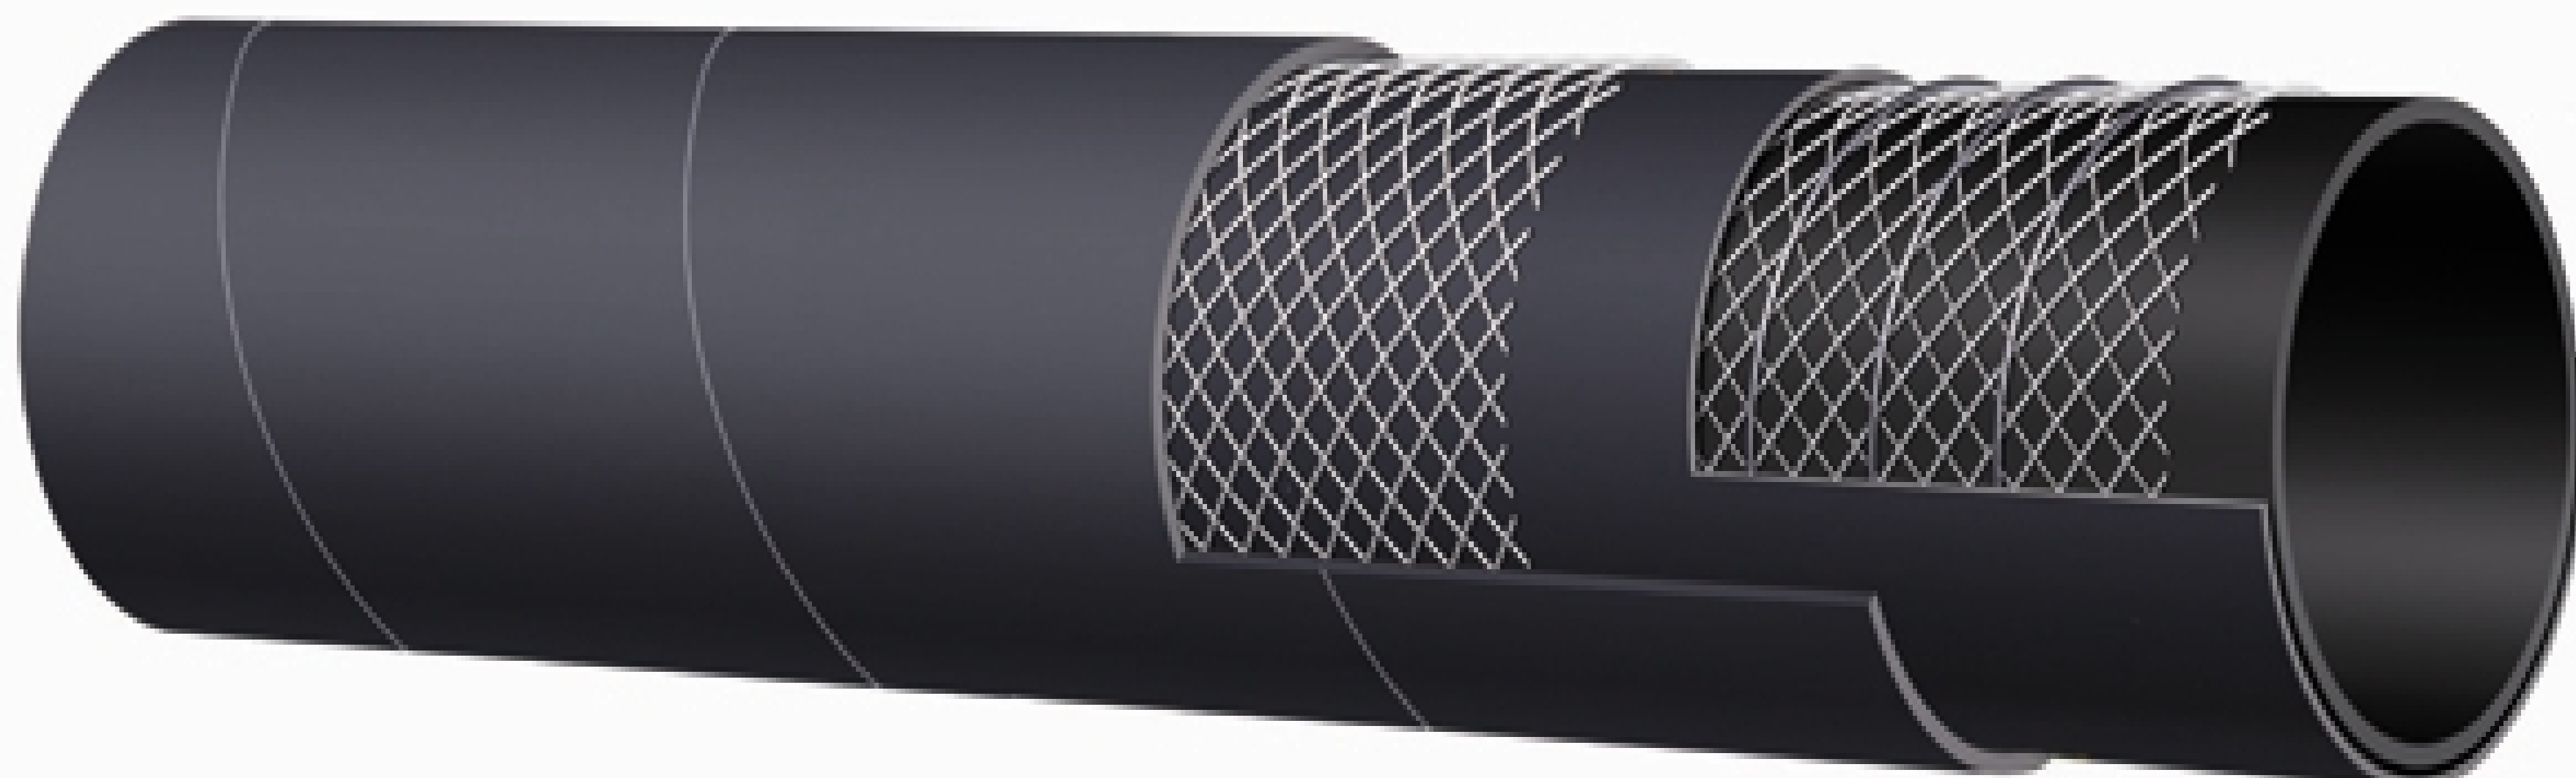

Construction:

Tube: Black conductive NBR.

Reinforcement: High tensile textile cords with steel helix wire and static wire.

Cover: Black conductive CR – abrasion, ozone and hydrocarbon resistant.

Working Pressure:

Constant Pressure – 20 Bar (300 PSI)

Service Temperature Range:

-22°F (-30°C) to +176°F (+80°C)

Branding:

ALFAGOMMA – ITALY T620 – 20 BAR (300 PSI)

PETROLEUM – S & D Ω (in red letters)

COUPLING SUGGESTIONS

Quick-Acting, combination nipples attached with bands or internally expanded brass couplings with gasket seal attached with ferrules.

Nominal Specifications

Series Number	ID (in)	ID (mm)	OD (in)	OD (mm)	Max Rec. WP (psi)	Vacuum HG (in)	Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
T620AA200	2	51	2.48	63	300	30	8	100	1.10
T620AA300	3	76	3.54	90	300	27	12	100	1.77
T620AA400	4	102	4.57	116	300	27	16	100	2.43
T620AA600	6	152	6.69	170	300	24	24	20/100	5.60
T620AA800	8	203	8.86	225	300	21	32	20	9.24

GEORGIA
3400 Town Point Dr.
Suite 130
Kennesaw, GA 30144

OHIO
2611 Thunderhawk Ct.
Dayton, OH 45414

(800) 344-0150 phone
(937) 454-2086 fax
sales@ushoseco.com
www.USHOSECO.com