


4-PLY SANDBLAST HOSE

THE T753AA SERIES (formerly T750AA) IS AN 180 PSI 4-PLY ABRASIVE MATERIAL BLAST HOSE DESIGNED TO CONVEY ABRASIVES, SAND AND SHOT BLAST MATERIAL.

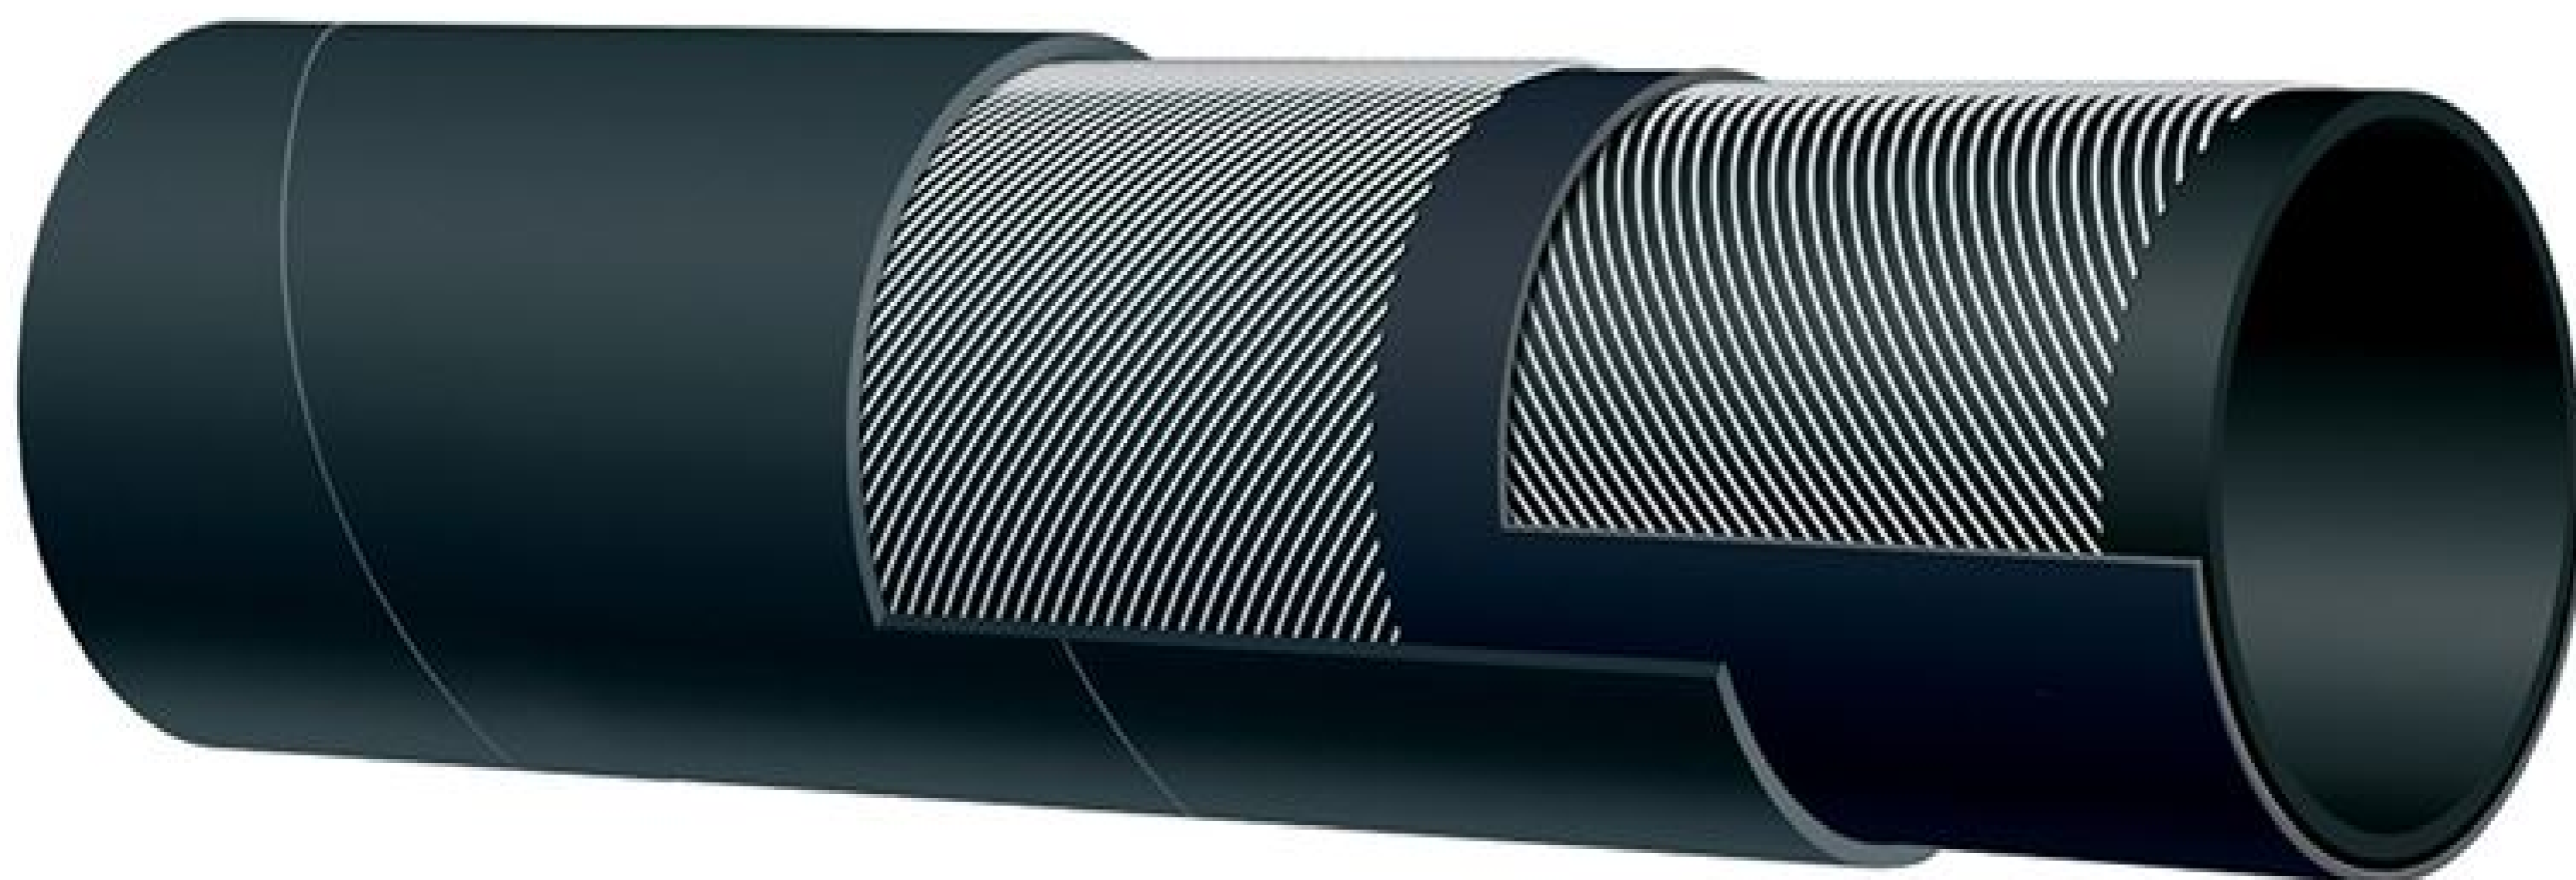

Construction:

Tube: Black static conducting natural rubber – offering excellent abrasion resistance, upgraded to 50mm³ (cubed) rating.

Reinforcement: High tensile textile cords – 4-ply construction.

Cover: Black or green, conductive SBR/NR blend – abrasion and ozone resistant – pin pricked.

Working Pressure:

Constant Pressure – 12 Bar (180 PSI)

Service Temperature Range:

-22°F (-30°C) to +176°F (+80°C)

Branding:

ALFAGOMMA – ITALY – 753 12 BAR (180 PSI)
PREMIUM ABRASIVE MATERIAL BLAST Ω (in white letters)

COUPLING SUGGESTIONS

Sandblast couplings and nozzle holders attached with screws. See next column for coupling part numbers.

Nominal Specifications

Series Number	ID (in)	ID (mm)	OD (in)	OD (mm)	Tube Thickness (mm)	Max Rec. WP (psi)	Standard Length (ft)	Weight (lbs/ft)
T753AA/AG075	3/4	19	1.50	38	0.236	180	50/100	0.68
T753AA/AG100	1	25	1.89	48	0.283	180	50/100	1.04
T753AA/AG125	1 1/4	32	2.17	55	0.283	180	50/100	1.23
T753AA/AG150	1 1/2	38	2.36	60	0.260	180	50/100	1.40
T753AA200	2	51	2.87	73	0.260	180	50/100	1.77

NOTE: Tolerances according to RMA Class 311-A

HOSE ID (in)	HOSE ENDS	NOZZLE HOLDERS	THREADED FEMALE ADAPTER	GASKETS
3/4	Q-AL1, Q-BR1, Q-PI1	NH-AL1, NH-BR1	–	SBG
1	Q-AL2, Q-BR2, Q-PI2	NH-AL2, NH-BR2	–	SBG
1 1/4	Q-AL3, Q-BR3, Q-PI3	NH-AL3, NH-BR3	SB-AL1, SB-BR1	SBG
1 1/2	Q-AL4, Q-BR4, Q-PI4	NH-AL4, NH-BR4	SB-AL2, SB-BR2	SBG

GEORGIA
3400 Town Point Dr.
Suite 130
Kennesaw, GA 30144

OHIO
2611 Thunderhawk Ct.
Dayton, OH 45414

(800) 344-0150 phone
(937) 454-2086 fax
sales@ushoseco.com
www.USHOSECO.com