


THE BREWWT

THIS BREWWT T422LH IS A STATE OF THE ART HOSE IS DESIGNED FOR SUCTION AND DISCHARGE OF LIQUID FOOD AND ALCOHOLIC BEVERAGE UP TO 95 PROOF. THIS VERSATILE AND LIGHT WEIGHT HOSE IS DESIGNED FOR APPLICATIONS REQUIRING SUPERB FLEXIBILITY, WHILE STILL MAINTAINING HIGH STRENGTH, AND DURABILITY UNDER WORKING PRESSURE IN DEMANDING ENVIRONMENTS.

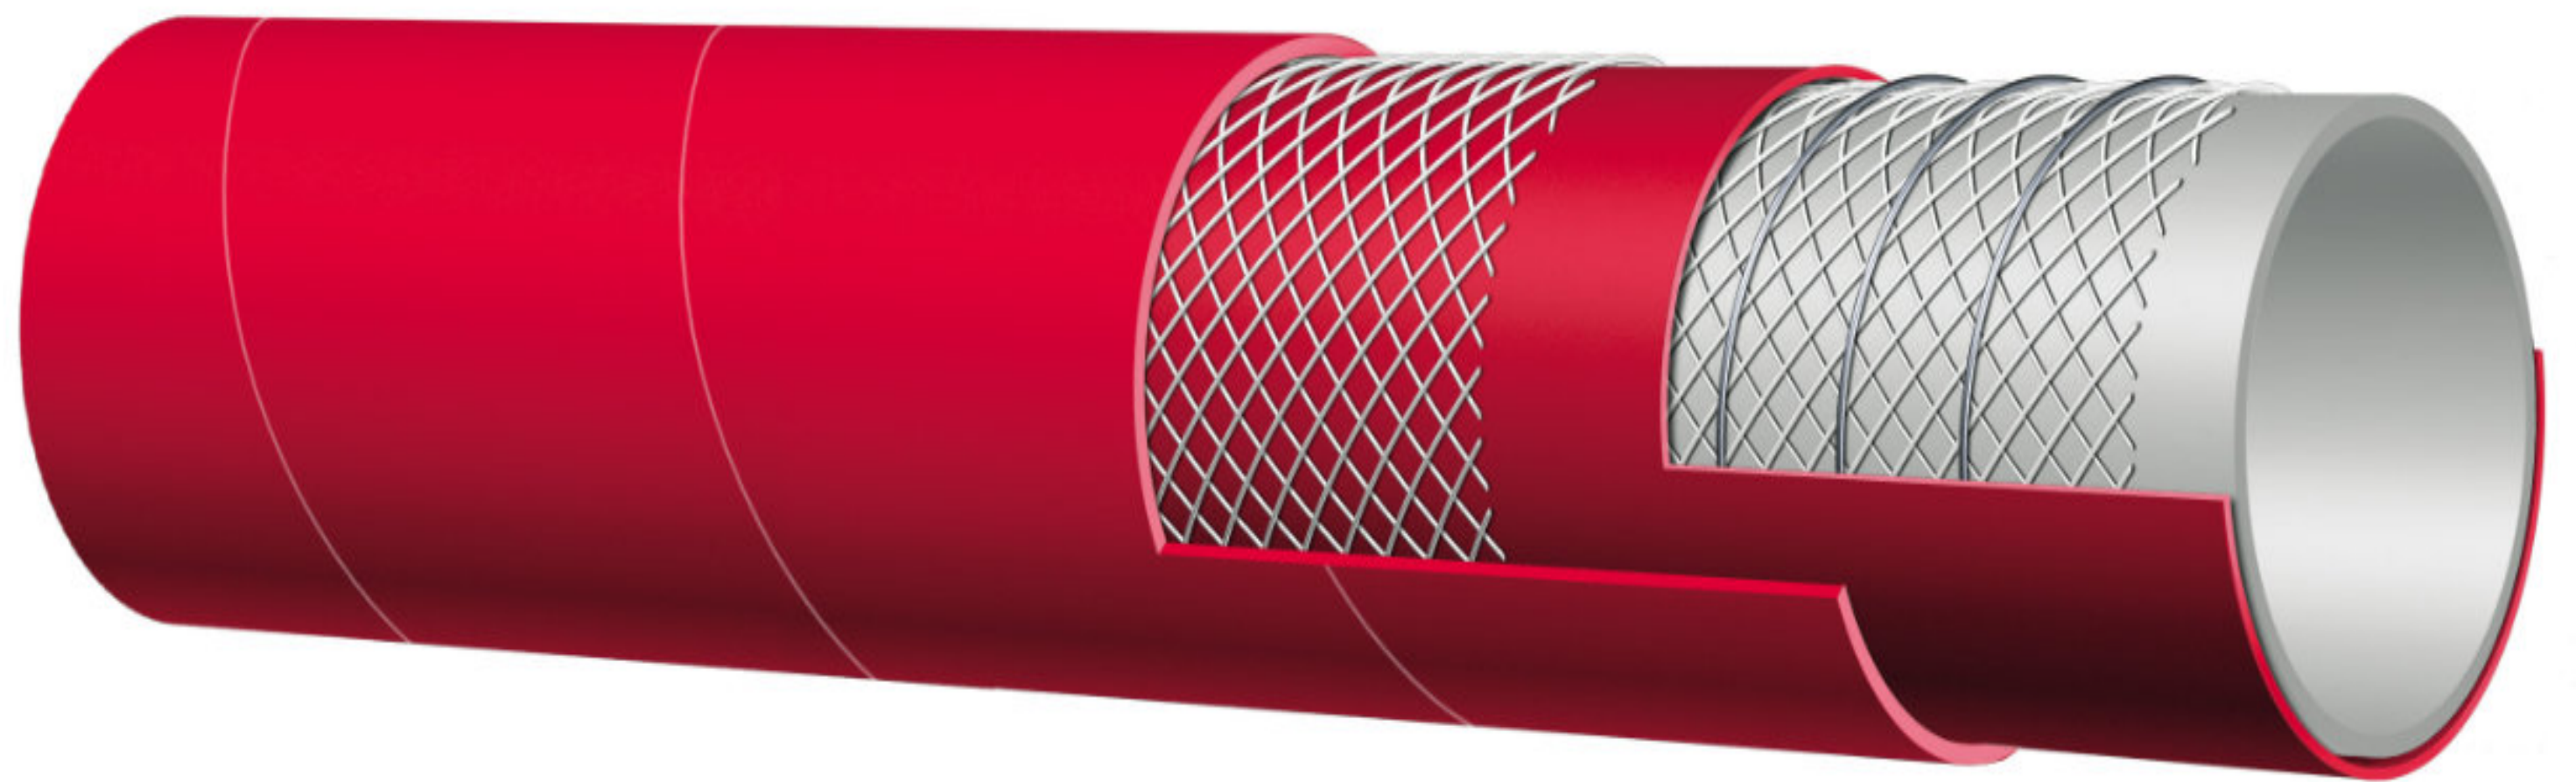

Construction:

- Tube - White Chlorobutyl meeting 3A (18-03) and FDA requirements.
- Reinforcement - High tensile textile cords with specially designed embedded helix wires.
- Cover - Red smooth NR/EPDM blend for abrasion and ozone resistance.

Service Temperature Range:

-22°F (-30°C) to +226°F (+108°C)

Branding:

ALFAGOMMA ITALY 422 10 bar (150 psi)
 BREWERY S&D (brewt logo) – extra flexible – FDA
 (white letters)



Features and Advantages:

- **Extreme Flexibility** – Uniquely designed for maximum flexibility, bends easily around brewery equipment and works well in tight spaces.
- **Lightweight** – Up to 25% lighter weight than similar rubber hoses, while still maintaining 150 PSI working pressure.
- **High Heat Resistance** - Chlorobutyl tube capable of handling +226°F (+108°C) on a continuous basis. Allows for sterilization with +266°F (+130°C) steam for 30 minutes or with 5% soda solution.
- **High Purity Tube** - Will not impart odor or taste.
- **Smooth Cover** – Designed for easy cleaning, no gaps or crevices for dirt or bacteria to hide. Also provides a smooth surface for clamping.

Series No.	ID		OD		Max. Rec. WP (PSI)	Vacuum HG (in.)	Min. Bend Radius (in. @ 68°F)	Standard Length Coils (ft.)	Weight (lbs./ft.)
	(in.)	(mm)	(in.)	(mm)					
T422LH100	1	25	1.38	35	150	30	2	100	0.47
T422LH125	1 1/4	32	1.65	42	150	30	2 1/2	100	0.58
T422LH150	1 1/2	38	1.89	48	150	30	3	100	0.67
T422LH200	2	51	2.40	61	150	30	4	100	0.88
T422LH250	2 1/2	63	3.00	76	150	30	5	100	1.59
T422LH300	3	76	3.54	90	150	27	6	100	2.04
T422LH400	4	102	4.57	116	150	27	8	100	2.67

GEORGIA
 3400 Town Point Dr.
 Suite 130
 Kennesaw, GA 30144

OHIO
 2611 Thunderhawk Ct.
 Dayton, OH 45414

(800) 344-0150 phone
(937) 454-2086 fax
sales@ushoseco.com
www.USHOSECO.com