


150 PSI EPDM LAYFLAT WATER DISCHARGE HOSE

THE T253AA SERIES WATER DISCHARGE HOSE IS RATED TO 150 PSI WORKING PRESSURE AND THE LAY-FLAT TYPE CONSTRUCTION MAKES THIS PRODUCT IDEAL FOR GENERAL INDUSTRIAL CONSTRUCTION AND IRRIGATION.

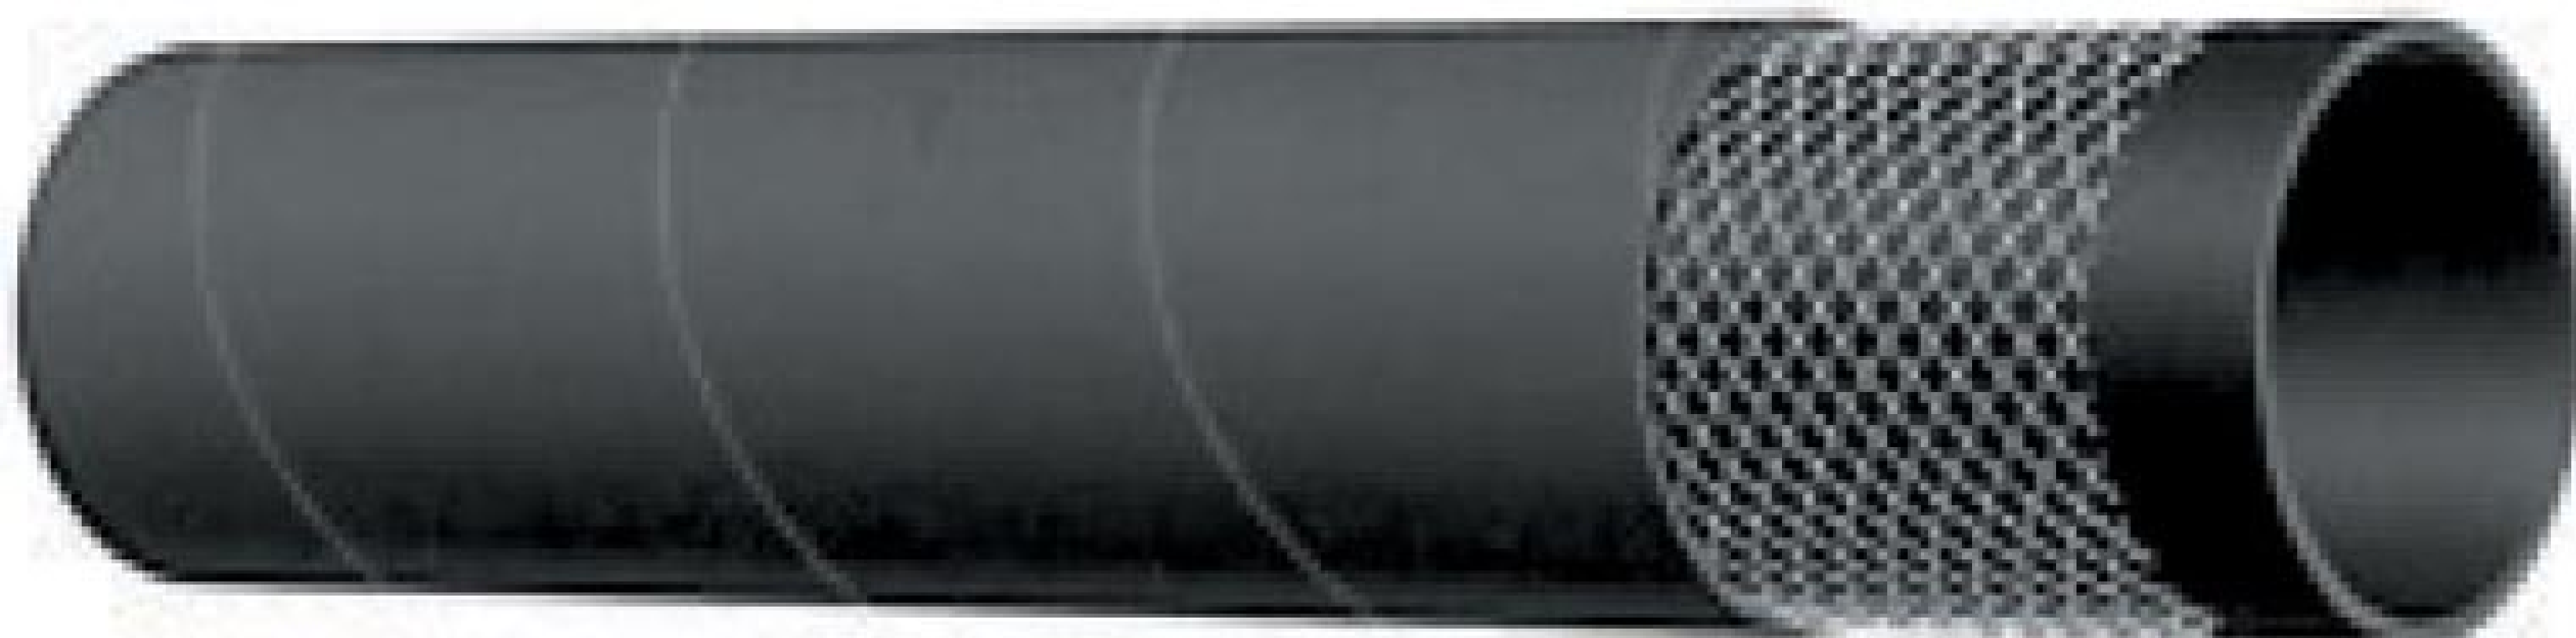

FOR APPLICATIONS INVOLVING INDUSTRIAL ACID CHEMICALS AND ALCOHOLS, PLEASE REFER TO PATRIOT® 1776 & 1776C EXTREME CHEMICAL HOSES.

Construction:

Tube: Black EPDM.

Reinforcement: High tensile textile cords.

Cover: Black EPDM – abrasion and ozone-resistant.

6-5/8" ID IS REFERRED TO AS ELEPHANT TRUNK HOSE AND IS IDEAL FOR "IRRIGATION BOOTS"

Working Pressure:

Constant Pressure – 10 Bar (150 PSI)

Service Temperature Range:

-22°F (-30°C) to +176°F (+80°C)

Branding:

Alfagomma – Italy – T253 10 Bar (150 PSI) EPDM WATER DISCHARGE (in green letters)

COUPLING SUGGESTIONS

Quick-Acting, pin lug, short shank couplings or combination nipples attached with single bolt, double bolt, wire or band type clamps.

Nominal Specifications

Series Number	ID (in)	ID (mm)	OD (in)	OD (mm)	Max Rec. WP (psi)	Standard Length (ft)	Weight (lbs/ft)
T253AA150	1 1/2	38	1.81	46	150	100	0.37
T253AA200	2	51	2.32	59	150	100	0.50
T253AA250	2 1/2	63	2.80	71	150	100	0.60
T253AA300	3	76	3.31	84	150	100	0.86
T253AA400	4	102	4.33	110	150	100	1.19
T253AA600	6	152	6.38	162	150	50/100	2.00
T253AA662	6 5/8*	168	7.01	178	150	50/100	2.17
T253AA800	8	203	8.46	215	150	50/100	2.82
T253AA1000	10	254	10.63	270	150	50/100	5.11
T253AA1200	12	305	12.56	319	150	50	5.93

GEORGIA
3400 Town Point Dr.
Suite 130
Kennesaw, GA 30144

OHIO
2611 Thunderhawk Ct.
Dayton, OH 45414

(800) 344-0150 phone
(937) 454-2086 fax
sales@ushoseco.com
www.USHOSECO.com