


# CONCRETE PUMPING HOSE

## HIGH PERFORMANCE STEEL-REINFORCED

THE T740AA SERIES IS A HIGH PERFORMANCE, STEEL-REINFORCED CONCRETE PUMPING HOSE WITH A HIGH WORKING PRESSURE OF 1275 PSI. WITH A SPECIAL, EASY-HANDLING CONSTRUCTION, THIS PRODUCT IS DESIGNED FOR CONCRETE PLACEMENT AT THE CASTING SITE.

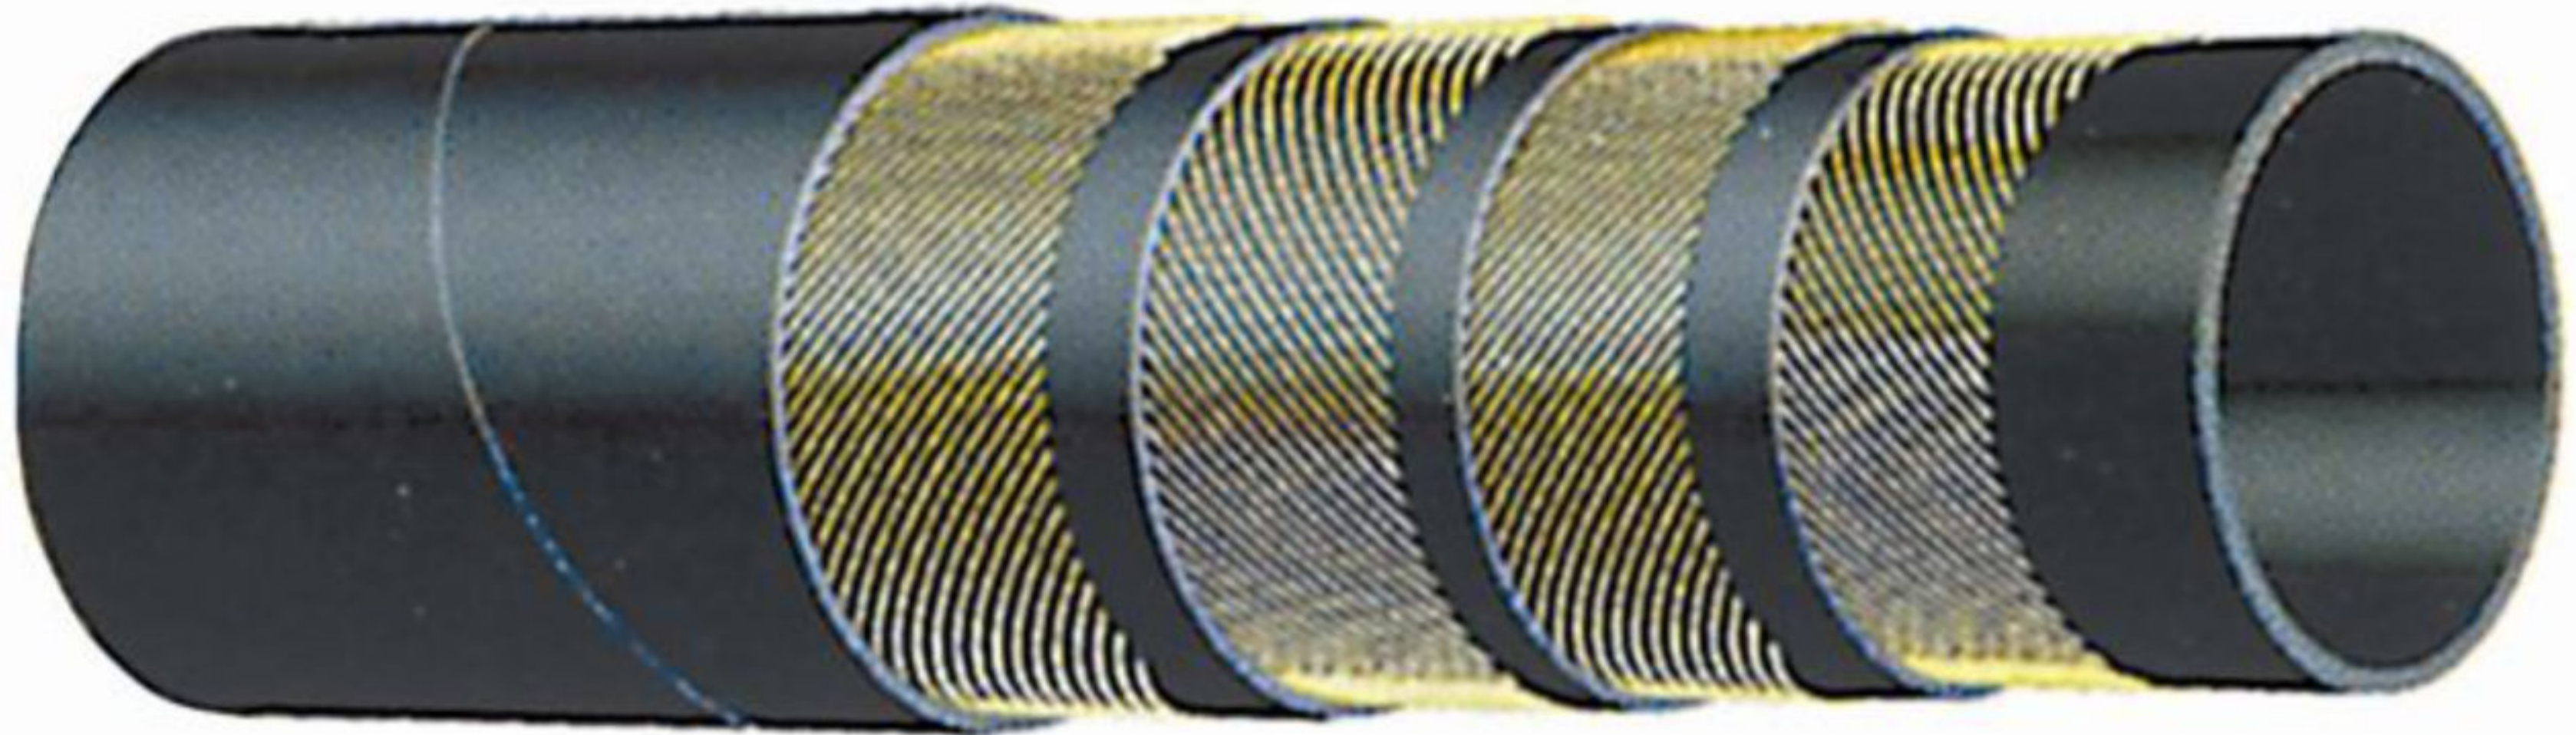

**Cover:**

Black conductive SBR/NR blend – abrasion and ozone resistant.

**Reinforcement:**

High tensile steel cords.

**Tube:**

Black conductive NR – abrasion resistant.

**Working Pressure:**

Working Pressure – 85 Bar (1275 PSI)

**Temperature Range:**

-22°F (-30°C) to 176°F (+80°C)

**Branding:**

ALFAGOMMA – ITALY T740 85 BAR (1275 PSI) W. P. HEAVY DUTY CONCRETE PUMPING (in white letters)

**COUPLING SUGGESTIONS**

Tubular steel full flow male permanently swaged or internally expanded with ferrule to provide maximum hose coupling compatibility.

**Nominal Specifications**

Series	ID (in.)	ID (mm)	OD (in.)	OD (mm)	Wall Thickness (mm)	Max Rec. WP (PSI)	Min. Bending Radius (in.)	Weight (lbs./ft.)
T740AA200	2	51	2.72	69	9	1275	10	1.44
T740AA250	2 1/2	63	3.35	85	11	1275	10 1/2	2.25
T740AA300	3	76	3.94	100	12	1275	15	3.06
T740AA400	4	102	5.04	128	13	1275	20	4.72
T740AA500	5	127	6.10	155	14	1275	25	6.95

MATERIAL HANDLING

**GEORGIA**  
3400 Town Point Dr.  
Suite 130  
Kennesaw, GA 30144

**OHIO**  
2611 Thunderhawk Ct.  
Dayton, OH 45414

(800) 344-0150 phone  
(937) 454-2086 fax  
sales@ushoseco.com  
www.USHOSECO.com