


HOT AIR BLOWER HOSE

THE T902AA SERIES IS AN 150 PSI HIGH QUALITY HOT AIR BLOWER HOSE DESIGNED SPECIFICALLY FOR HOT AIR TRANSFER BETWEEN THE AIR COMPRESSOR AND DRY BULK TANK ON BULK MATERIAL CARRIERS.

***REPLACEMENT FOR TRANSPORTER® HOT AIR BLOWER HOSE.**

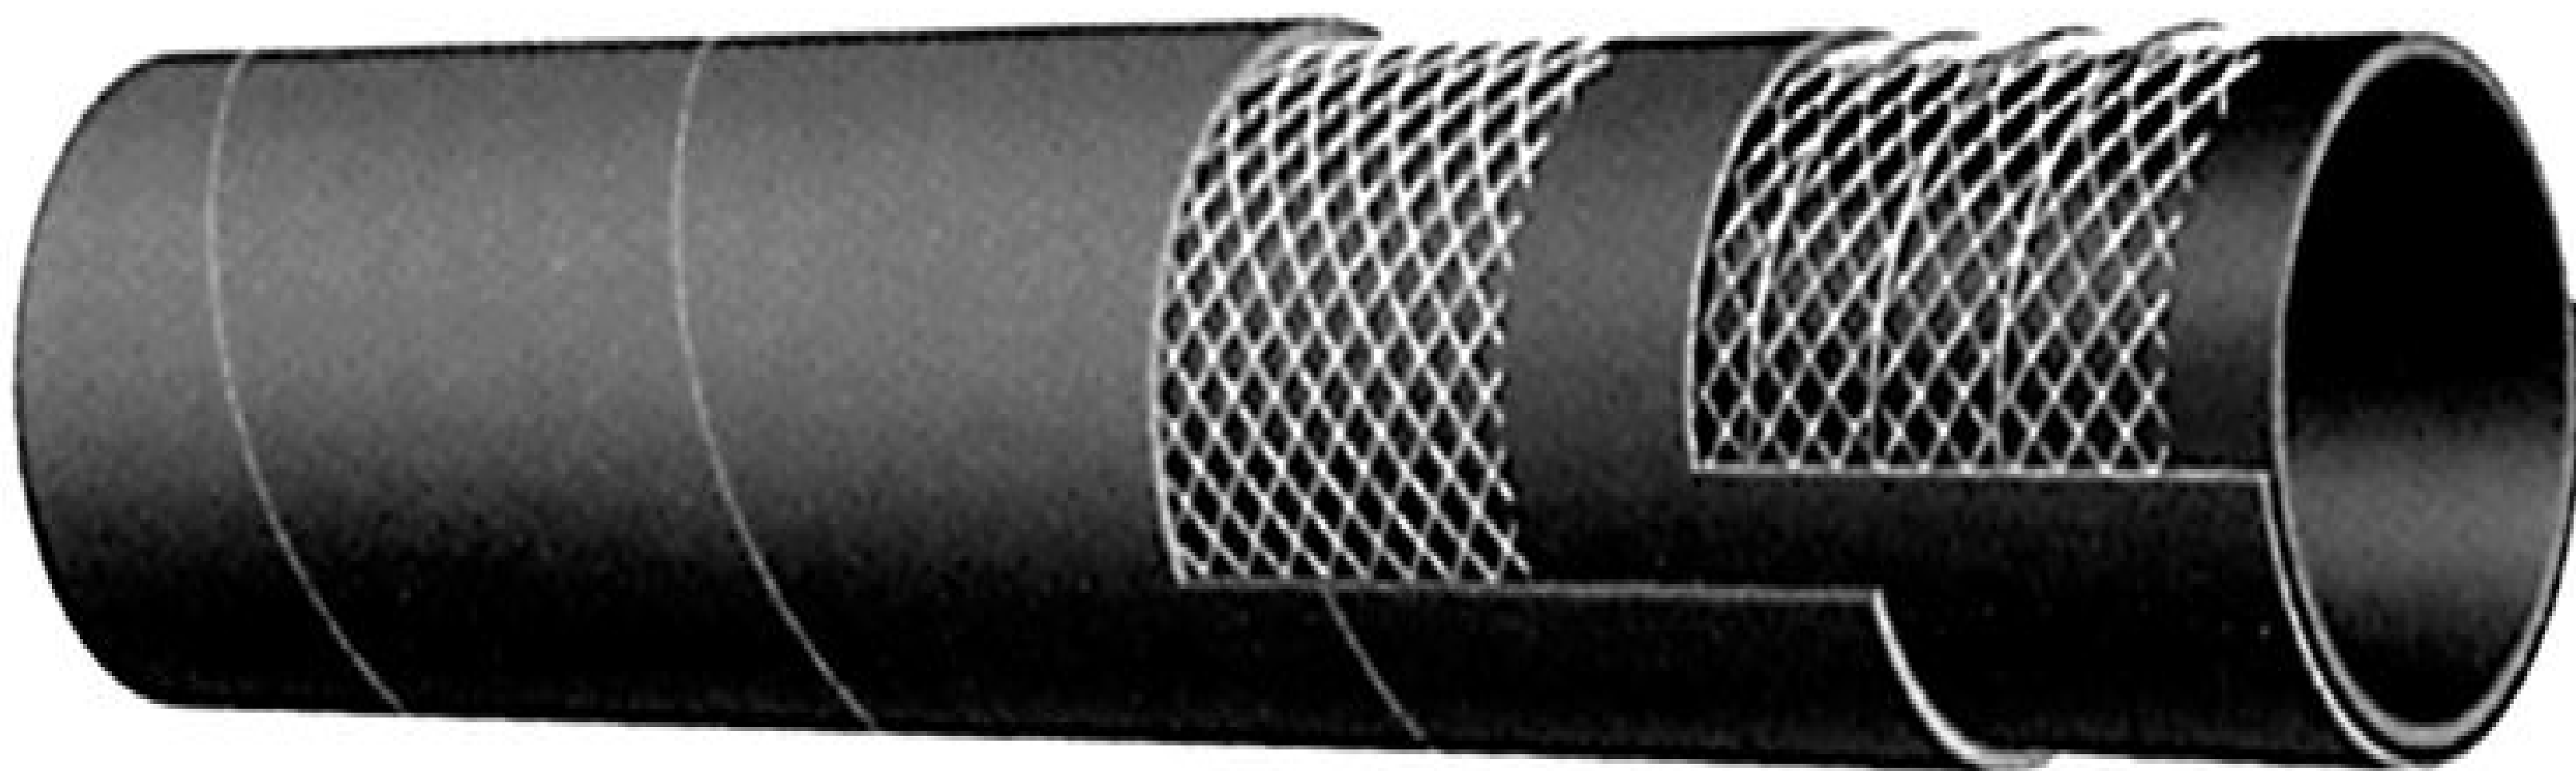

Construction:

Tube: Black EPDM – heat-resistant.
Reinforcement: Spiraled high tensile textile cords with flexible steel helix wire.
Cover: Black EPDM – heat, abrasion and ozone resistant.

Working Pressure:

Constant Pressure – 10 Bar (150 PSI)

Service Temperature Range:

-40°F (-40°C) to +356°F (+180°C)

COUPLING SUGGESTIONS

Quick-Acting, pin lug, short shank couplings or combination nipples attached with single bolt, double bolt, wire or band type clamps.

Nominal Specifications

Series Number	ID (in)	ID (mm)	OD (in)	OD (mm)	Max Rec. WP (psi)	Vacuum HG (in)	Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
T902AA200	2	51	2.48	63	150	30	6	100	1.01
T902AA300	3	76	3.54	90	150	27	9	100	1.60
T902AA400	4	102	4.57	116	150	27	12	100	2.23

MATERIAL HANDLING

GEORGIA
 3400 Town Point Dr.
 Suite 130
 Kennesaw, GA 30144

OHIO
 2611 Thunderhawk Ct.
 Dayton, OH 45414

(800) 344-0150 phone
(937) 454-2086 fax
 sales@ushoseco.com
 www.USHOSECO.com