


75 PSI LIGHT WEIGHT DRY POWDER DELIVERY HOSE

THIS HOSE IS
IDEAL FOR
DISCHARGE OF
DRY POWDERS
UNDER LOW
PRESSURE, SUCH
AS DRY CEMENT,
GRAINS AND
ANIMAL FEED
TRANSFER.

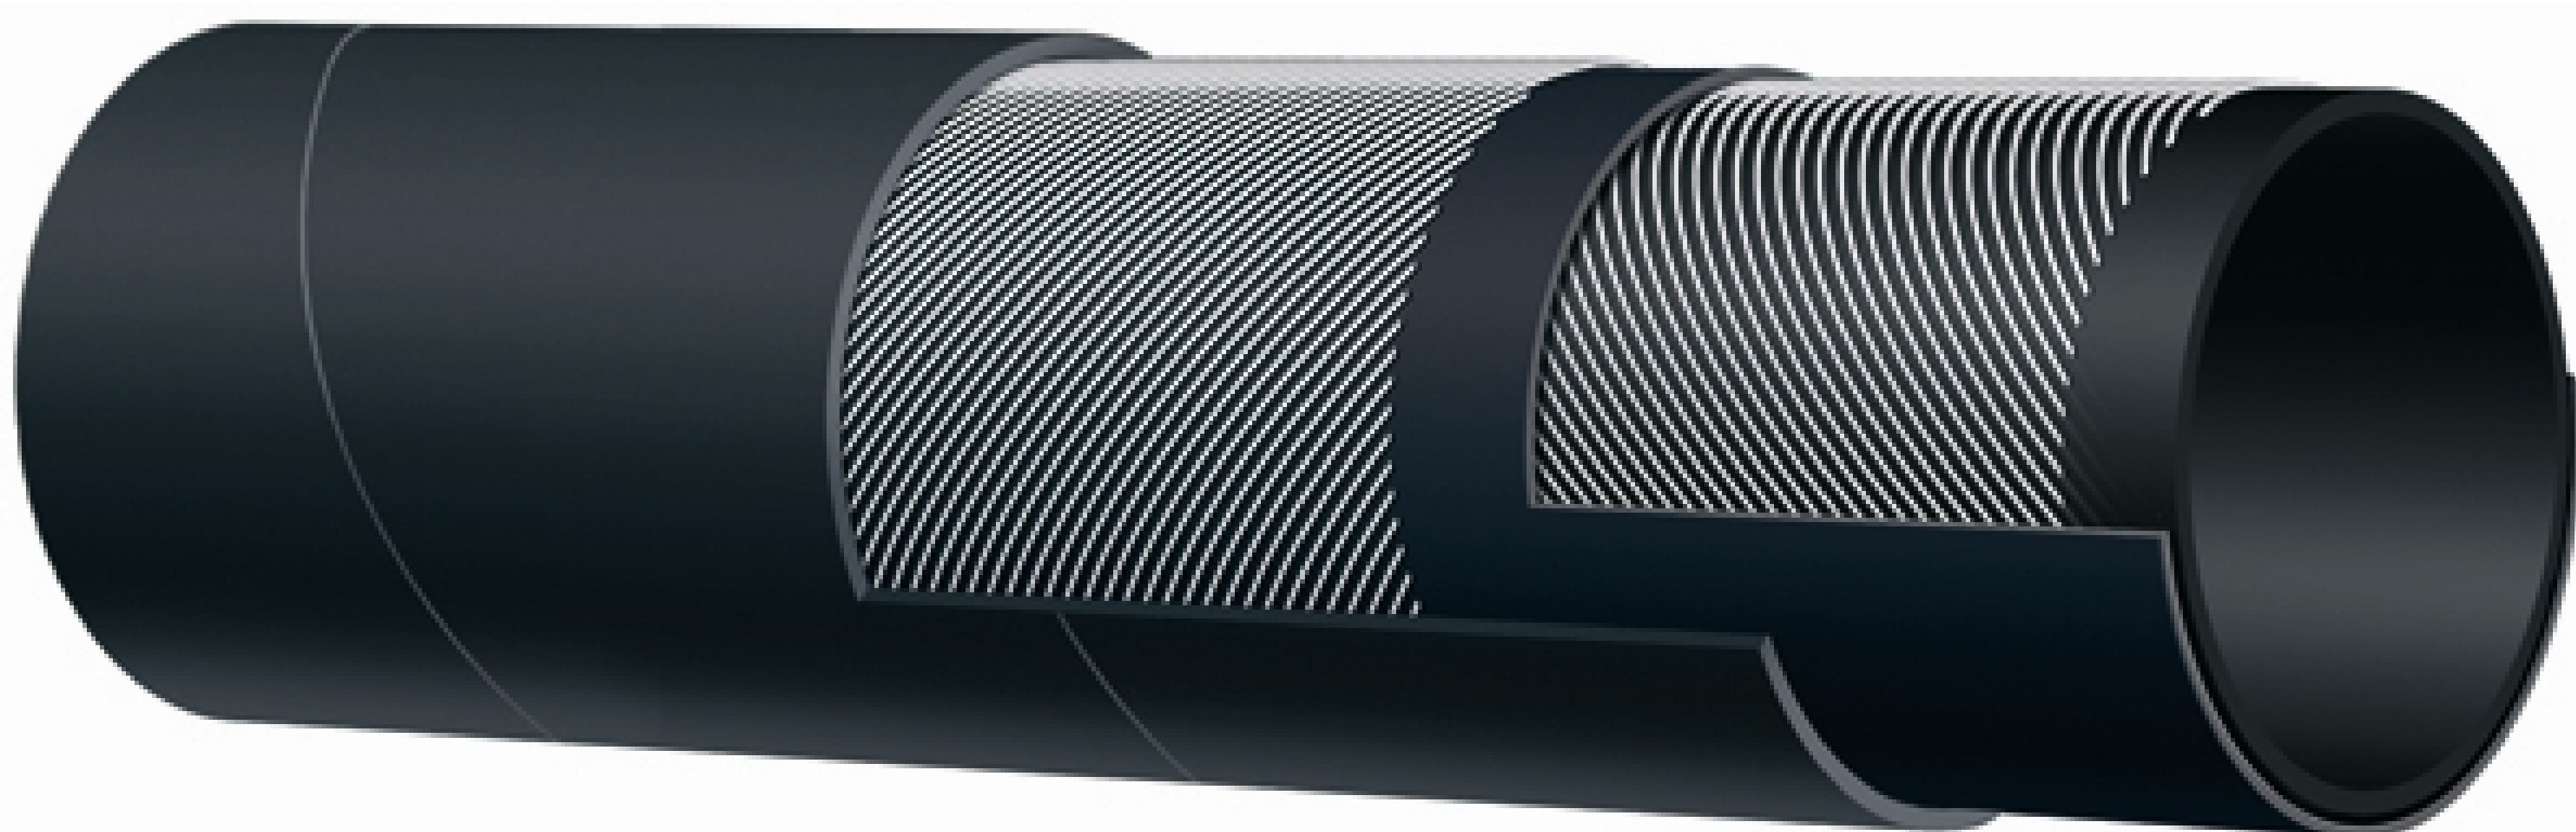

Construction:

Tube: 3/16" black static conducting NR – compounded to resist cutting by abrasive materials.

Reinforcement: Spiraled high tensile textile cords.

Cover: Black conductive SBR/NR blend – abrasion and ozone resistant.

Working Pressure:

Constant Pressure – 5 Bar (75 PSI)

Service Temperature Range:

-22°F (-30°C) to +176°F (+80°C)

Branding:

ALFAGOMMA – ITALY T760 5 BAR (75 PSI) BULK MATERIAL DELIVERY (in white letters)

Series Number	ID (in)	ID (mm)	OD (in)	OD (mm)	Max Rec. WP (psi)	Standard Length (ft)	Weight (lbs/ft)
T760AA400	4	102	4.53	115	75	100	1.58
T760AA450	4 1/2	115	5.00	127	75	100	1.85
▶ T760AA500	5	127	5.47	139	75	100	2.05
▶ T760AA600	6	152	6.61	168	75	100	2.30

MATERIAL HANDLING

GEORGIA
3400 Town Point Dr.
Suite 130
Kennesaw, GA 30144

OHIO
2611 Thunderhawk Ct.
Dayton, OH 45414

(800) 344-0150 phone
(937) 454-2086 fax
sales@ushoseco.com
www.USHOSECO.com