


PUMPFLEX® 1 - SOFTWALL HOSE

PUMPFLEX® 1 IS DESIGNED FOR CURB PUMP APPLICATIONS AT SERVICE STATIONS AND CONVENIENCE STORES AND IS THE LONGEST LASTING AUTOMOTIVE REFUELING HOSE IN USE AT SERVICE STATIONS TODAY. THE DURABLE CONSTRUCTION OF THIS HOSE RESISTS DETERIORATION FROM FUEL, OZONE, SUNLIGHT AND CRACKING AROUND/BEHIND THE NOZZLE END COUPLING.

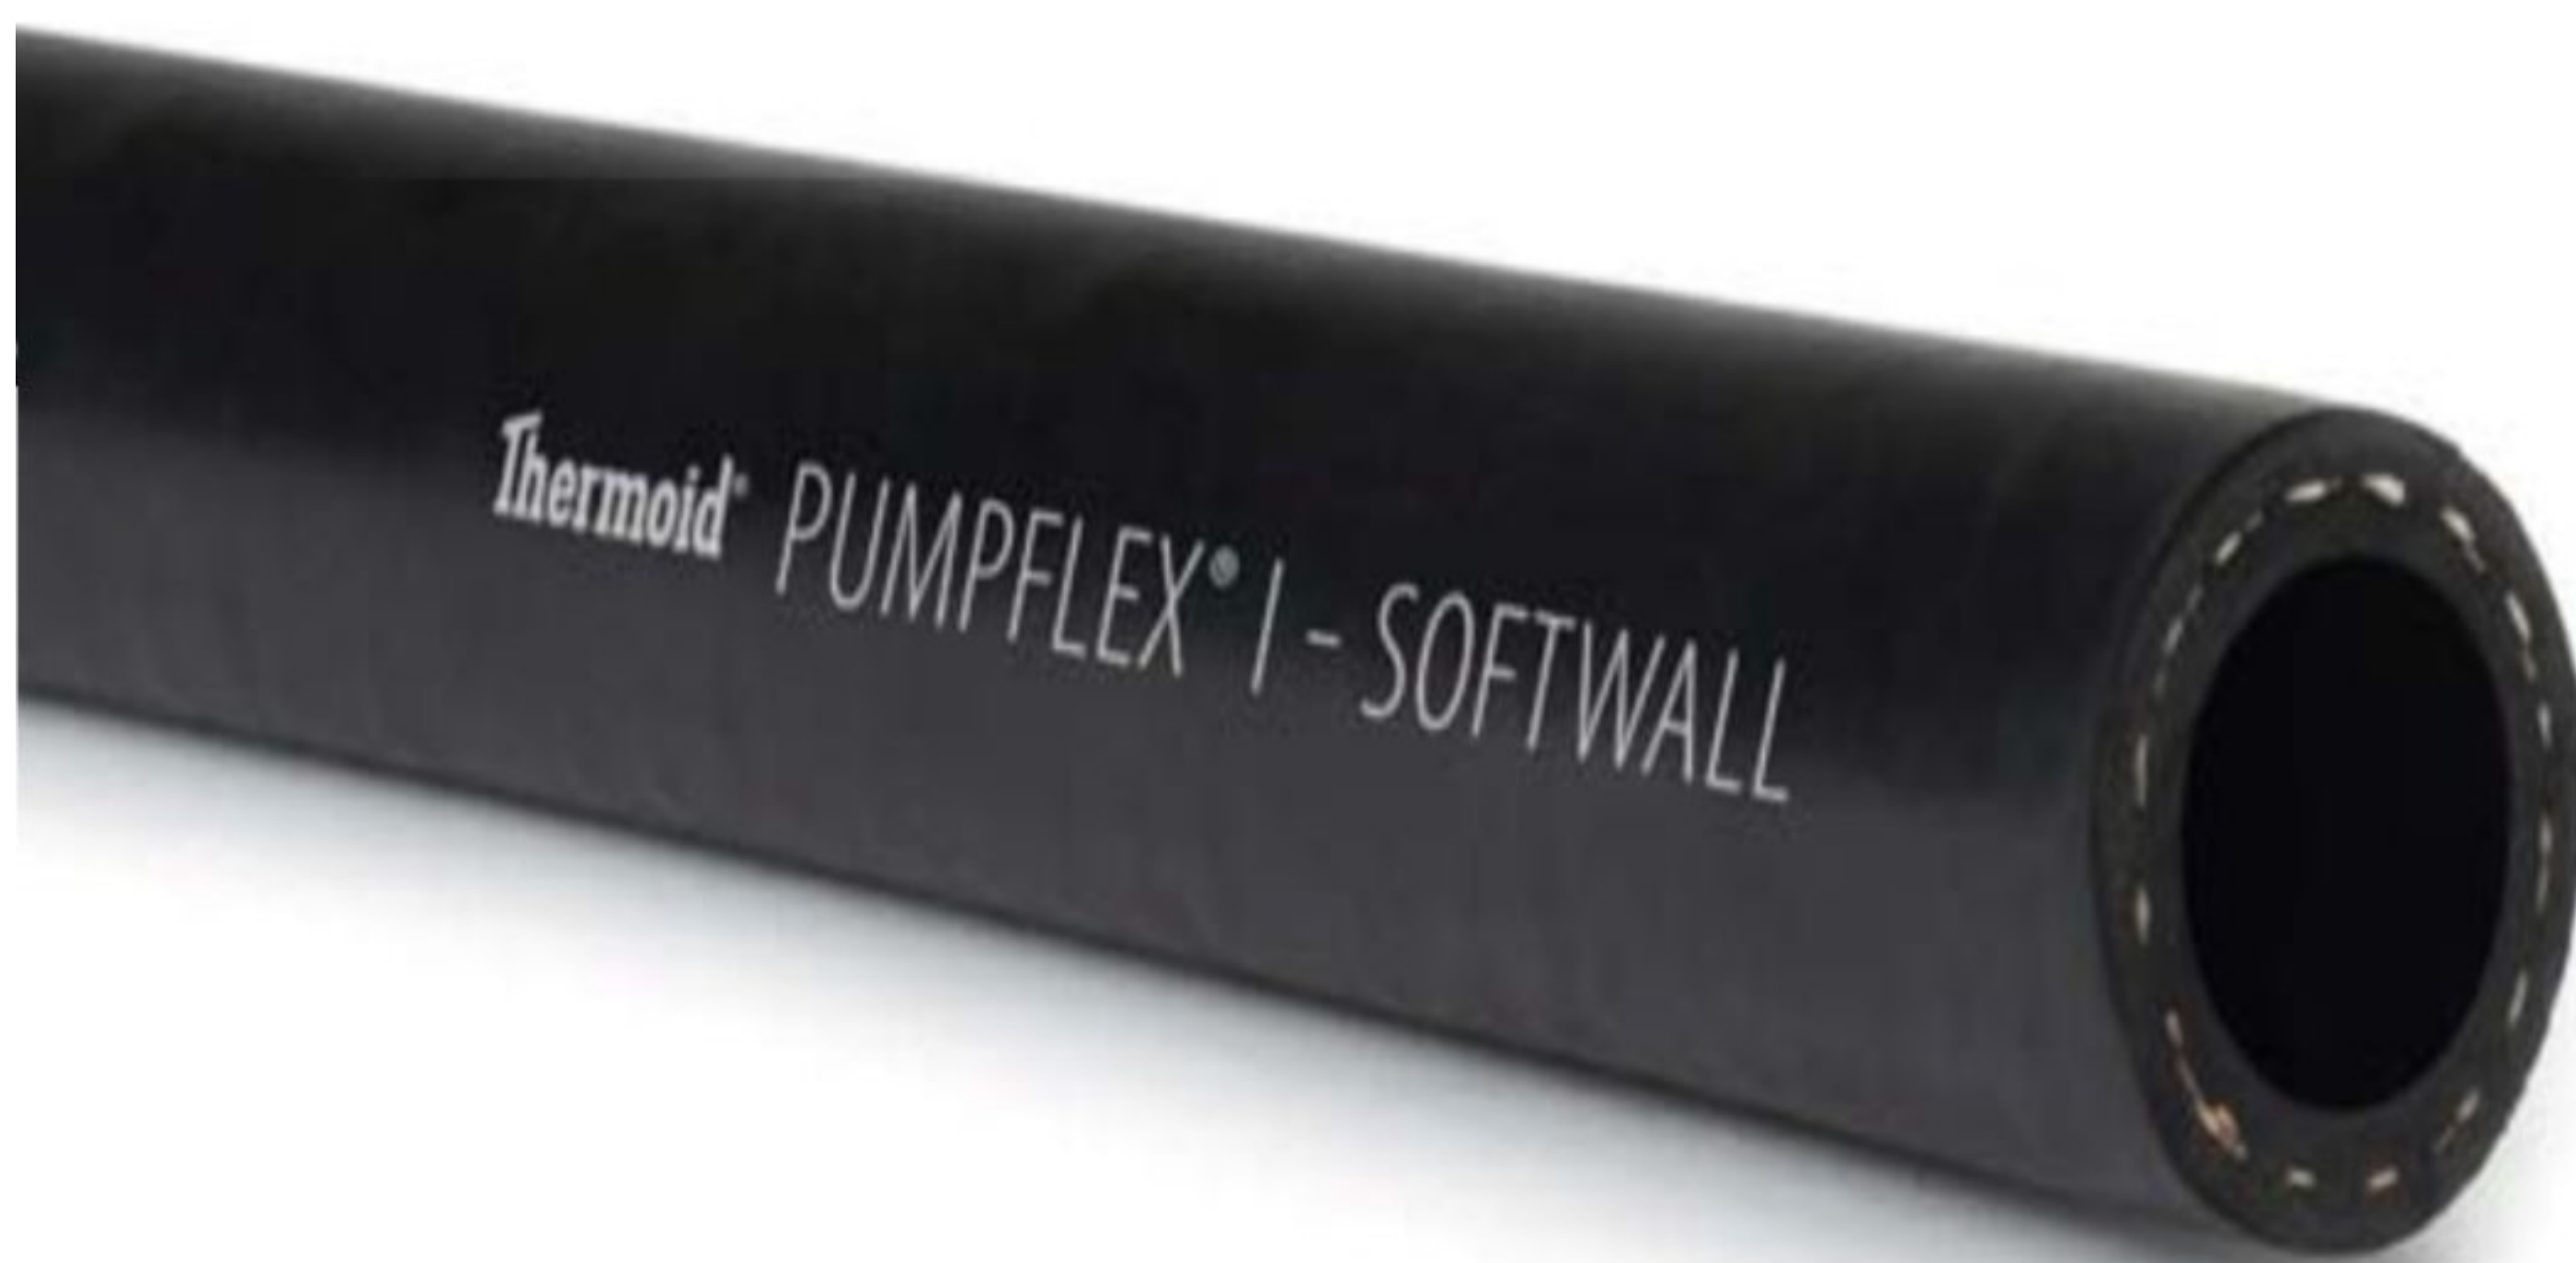

<p>RESISTANCE</p> <div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> Aging </div> <div style="text-align: center;"> Diesel Aromatic Fuels </div> <div style="text-align: center;"> Gasoline </div> </div> <div style="display: flex; justify-content: space-around; margin-top: 10px;"> <div style="text-align: center;"> Kerosene </div> <div style="text-align: center;"> Oil </div> <div style="text-align: center;"> Ozone </div> <div style="text-align: center;"> Sunlight </div> </div> <p>BRANDING: Thermoid Size Pumpflex I Gasoline Hose UL Listed 97MO Made In USA Month/Year</p> <p>COVER COLOR: Black</p> <p><i>Note: Do not use reusable couplings with this product.</i></p>	<p>CONSTRUCTION</p> <p>TUBE: Nitrile Blend, ARPM - Class A</p> <ul style="list-style-type: none"> • High Oil Resistant • Handles Gasoline • Handles Kerosene • Handles Diesel • Handles Bio-Diesel Fuel <p>COVER: Thermalon™, U/L Approved, Class B</p> <ul style="list-style-type: none"> • Medium-High Oil Resistant • Ozone and Sunlight Resistant <p>REINFORCEMENT: 2-Spiral Polyester Cord with Static Wire (Softwall)</p> <ul style="list-style-type: none"> • Provides a Working Pressure to 150-200 psi Depending on the I.D. 	<p>TEMPERATURE RANGE: -40°F to +180°F, -40°C to +82°C</p> <p>PACKAGING: Reels or Coupled Lengths – See Table Below</p> <ul style="list-style-type: none"> • Meets Industry Standards <p>MOLDED COVER PROCESS</p> <ul style="list-style-type: none"> • Showroom Quality • Dust Free
--	---	--

Product Number	Packaging	Nominal I.D.		Nominal O.D.		Reinforcement Spirals	Working Pressure		Min. Bend Radius		Weight	
	Reels (ft.)	(inches)	(mm)	(inches)	(mm)		(psi)	(Mpa)	(inches)	(mm)	(lb/ft)	(Kg/m)
22462401662	500-700*	¾	15.88	1.03	26.19	2	200	1.38	3.75	95.25	0.27	0.40
22462481662	500-700*	¾	19.05	1.13	28.58	2	200	1.38	4.50	114.30	0.32	0.48
22464641662	300-500*	1	25.40	1.50	38.10	4	150	1.03	7.00	177.80	0.62	0.92

PETROLEUM

GEORGIA
3400 Town Point Dr.
Suite 130
Kennesaw, GA 30144

OHIO
2611 Thunderhawk Ct.
Dayton, OH 45414

(800) 344-0150 phone
(937) 454-2086 fax
sales@ushoseco.com
www.USHOSECO.com