


# 300 PSI AIR DRILL TEXTILE CORD HOSE

THIS IS A HIGH  
QUALITY AIR HOSE  
FOR MINING AND  
CONSTRUCTION  
SERVICE.

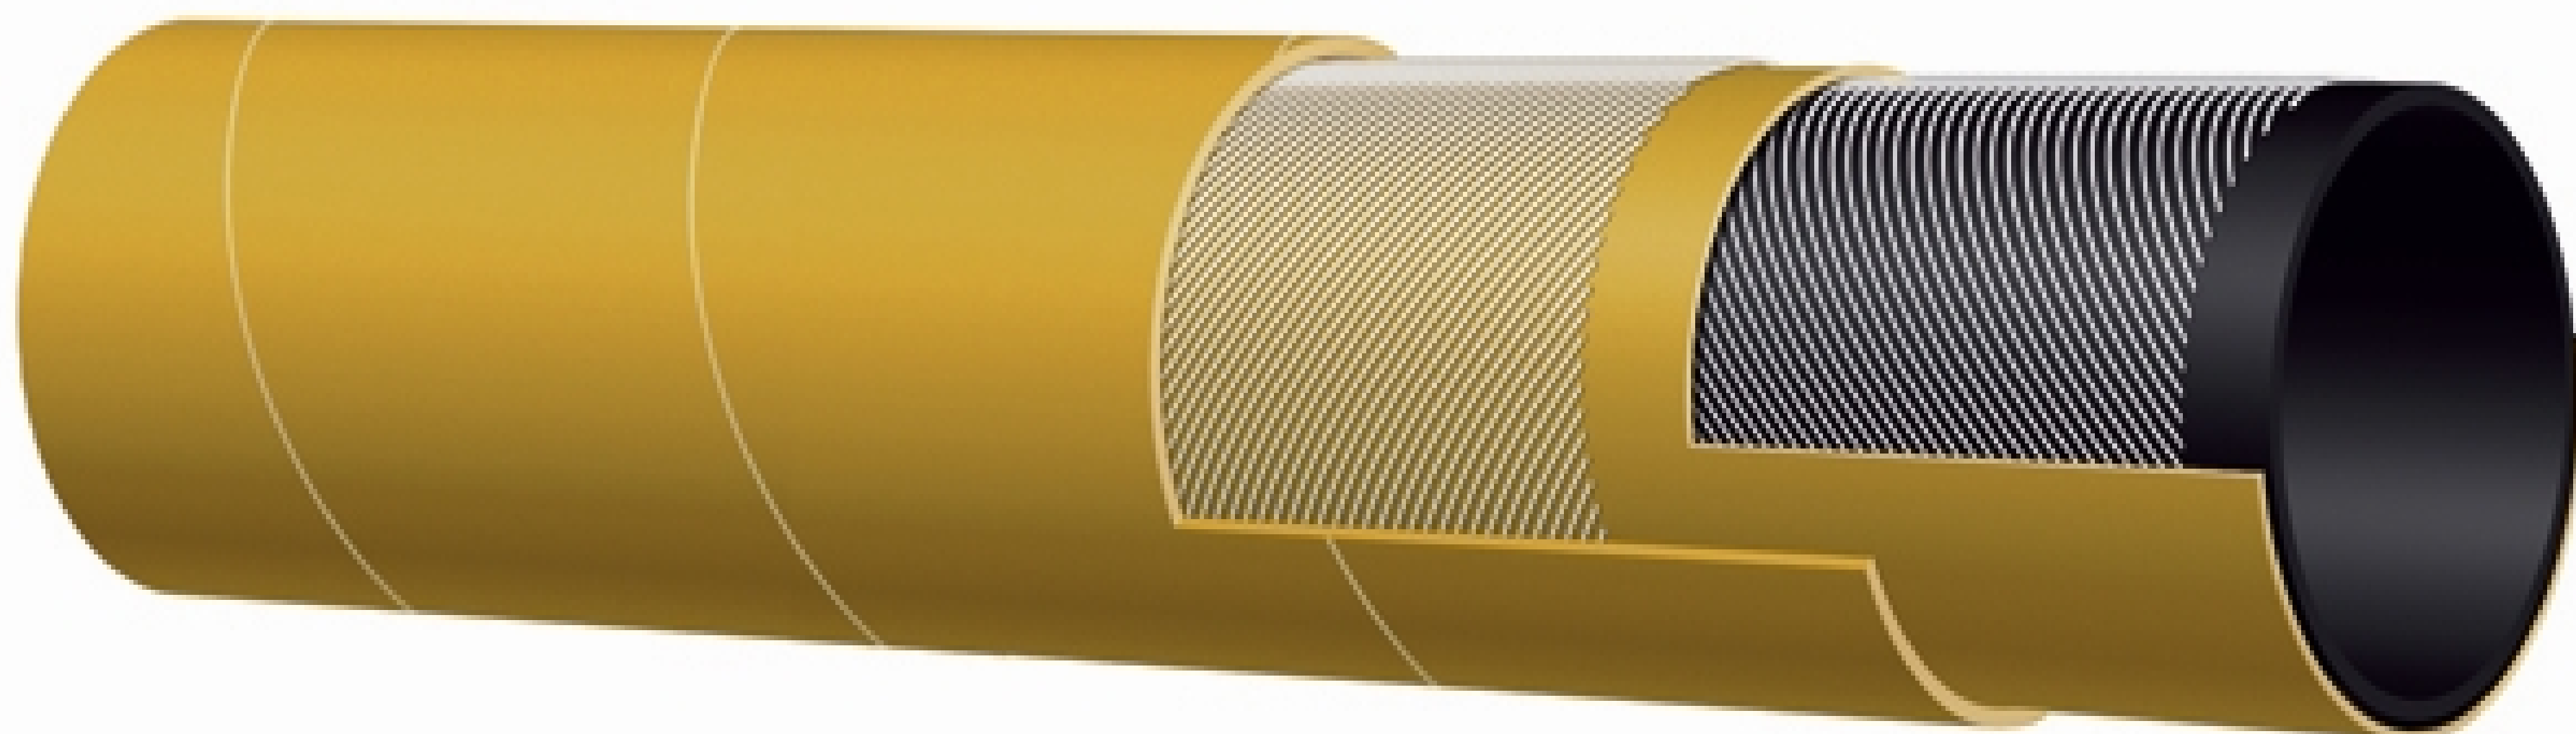

**Cover:**

Yellow SBR – abrasion and ozone-resistant.

**Reinforcement:**

Spiralled, high tensile textile cords.

**Tube:**

Black SBR/NBR blend – oil mist resistant.

**Working Pressure:**

Constant Pressure – 20 Bar (300 PSI)

**Temperature Range:**

-22°F (-30°C) to 176°F (+80°C)

**Branding:**

ALFAGOMMA – ITALY – T155 20 BAR (300 PSI) AIR (in blue letters)

## Nominal Specifications

Series	ID (in.)	ID (mm)	OD (in.)	OD (mm)	Max Rec. WP (PSI)	Weight (lbs./ft.)
T155AK050	1/2	13	0.83	21	300	0.22
T155AK075	3/4	19	1.14	29	300	0.38
T155AK100	1	25	1.38	35	300	0.48
T155AK125	1 1/4	32	1.73	44	300	0.60
T155AK150	1 1/2	38	1.97	50	300	0.70
T155AK200	2	51	2.56	65	300	1.12
T155AK250	2 1/2	63	3.11	79	300	1.55
T155AK300	3	76	3.62	92	300	1.89
T155AK400	4	102	4.65	118	300	2.47

**COUPLING SUGGESTIONS:** STEEL OR MALLEABLE IRON MALE INSERT NPT, FEMALE GROUND JOINT OR WASHER TYPE WITH SPUD, ATTACHED WITH 2 OR 4 BOLT INTERLOCKING CLAMPS OR BANDS. UNIVERSAL COUPLINGS MAY BE USED ON SIZES 1/2"-2"

**GEORGIA**  
3400 Town Point Dr.  
Suite 130  
Kennesaw, GA 30144

**OHIO**  
2611 Thunderhawk Ct.  
Dayton, OH 45414

(800) 344-0150 phone  
(937) 454-2086 fax  
sales@ushoseco.com  
www.USHOSECO.com

COMPRESSED AIR