


# 2-PLY SANDBLAST HOSE

THE T755AA SERIES (formerly LT753AA) IS AN 180 PSI 2-PLY ABRASIVE MATERIAL BLAST HOSE DESIGNED TO CONVEY ABRASIVES, SAND AND SHOT BLAST MATERIAL.

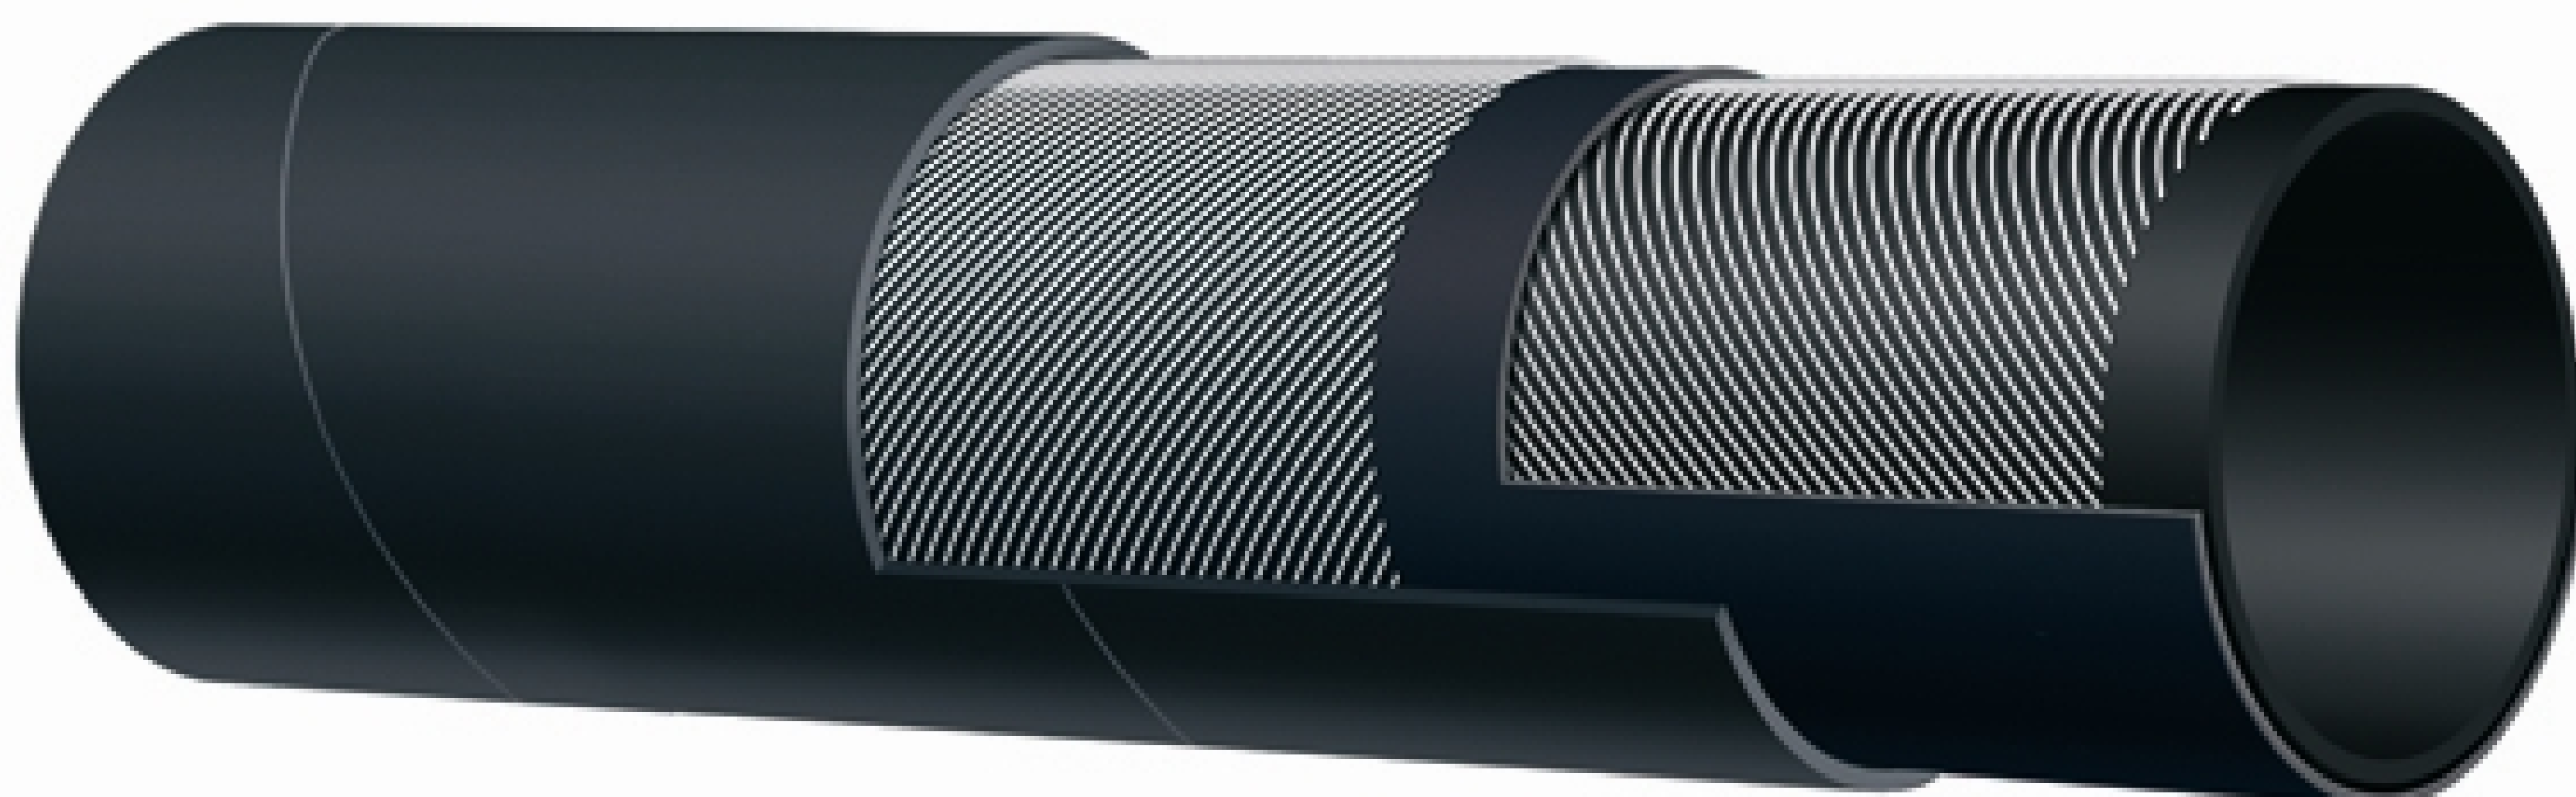

### Construction:

**Tube:** Black static conducting NR – offering excellent abrasion resistance, upgraded to 36mm<sup>3</sup> (cubed) rating.

**Reinforcement:** High tensile textile cords – 2-ply construction.

**Cover:** Black conductive SBR/NR blend – abrasion and ozone resistant – pin pricked.

### Working Pressure:

Constant Pressure – 12 Bar (180 PSI)

### Service Temperature Range:

-22°F (-30°C) to +176°F (+80°C)

### Branding:

ALFAGOMMA – ITALY - 755 12 BAR (180 PSI)  
TOP ABRASIVE MATERIAL BLAST Ω (in white letters)

## Nominal Specifications

Series	ID (in)	ID (mm)	OD (in)	OD (mm)	Tube Thickness (mm)	Max Rec. WP (psi)	Weight (lbs/ft)
T755AA050	1/2	13	1.06	27	0.212	180	0.34
T755AA125	1 1/4	32	1.89	48	0.240	180	0.77

NOTE: Tolerances according to RMA Class 311-A

## Blasting Data Guide

Premature hose wear can be prevented if the proper nozzle size is used for the corresponding hose ID size. (See chart below)

### Blasting Data Guide

Series	UB8	UB7	UB6	UB5	UB4
NOZZLE SIZE	1/2	7/16	3/8	5/16	1/4
CFM @ 100 PSI	350	260	200	150	90
AIR HOSE	2	1 1/2	1 1/2	1 1/4	1 1/4
S.B. HOSE SIZE	1 1/2	1 1/2	1 1/4	1 1/4	1
MAT. LB/HR	2250	1750	1260	900	540