


150 PSI EPDM GENERAL PURPOSE WATER SUCTION & DISCHARGE HOSE

THE SERIES T202AA EPDM GENERAL PURPOSE WATER HOSE IS BUILT FOR SUCTION AND DISCHARGE OF NON-CORROSIVE LIQUIDS FOR IRRIGATION, CONSTRUCTION, FERTILIZERS AND LASSO ACID SOLUTIONS.

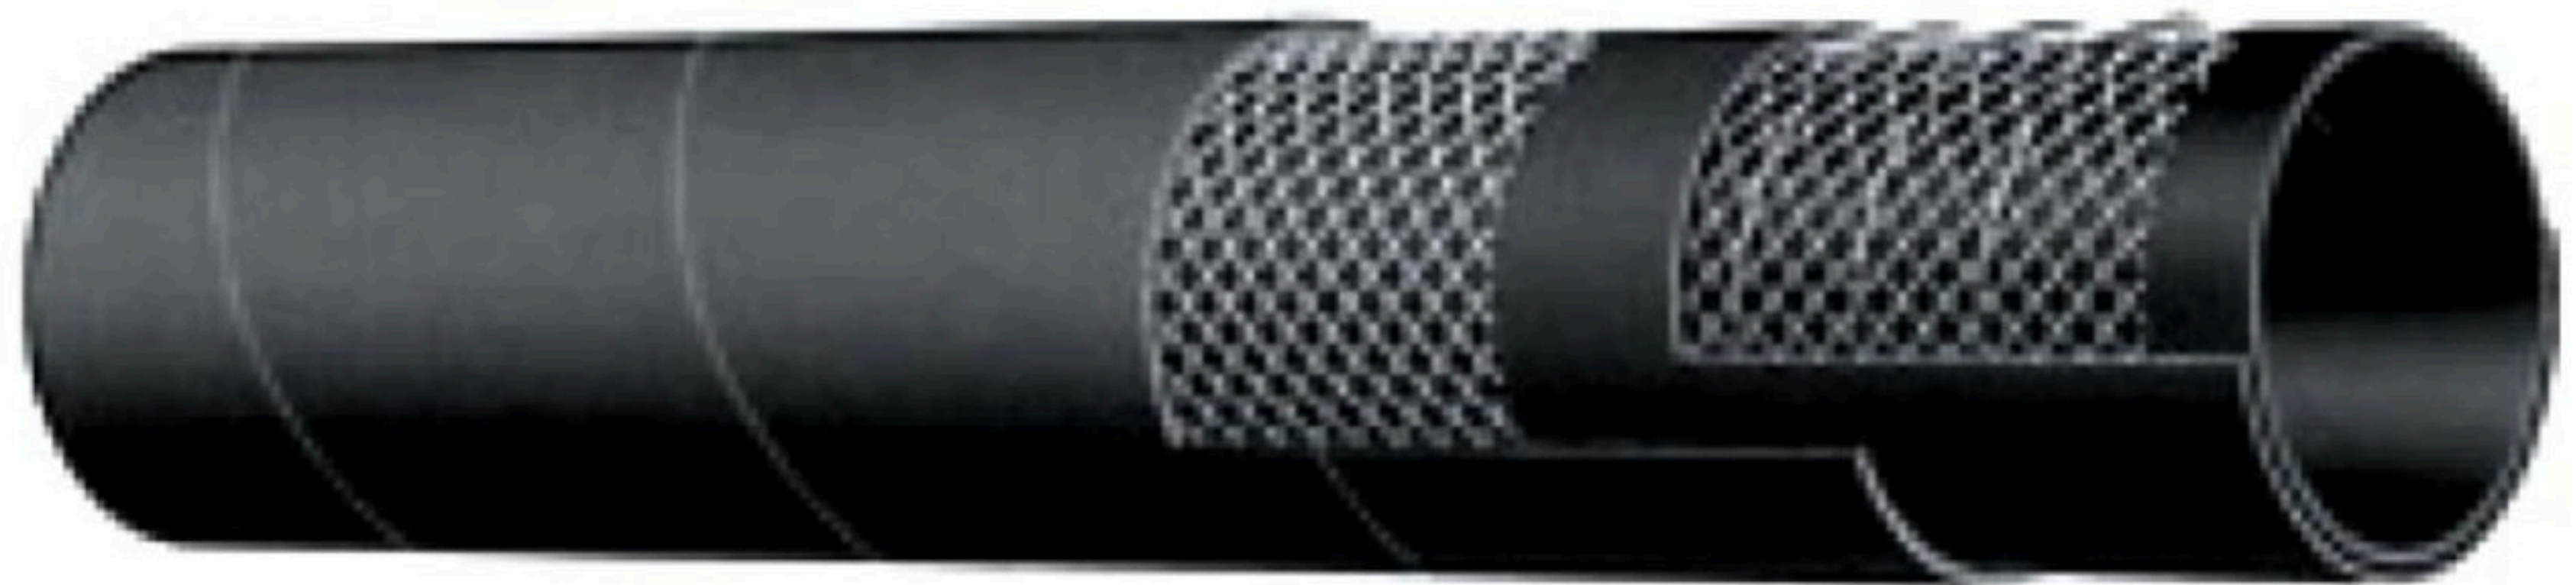

FOR APPLICATIONS INVOLVING INDUSTRIAL ACID CHEMICALS AND ALCOHOLS, PLEASE REFER TO PATRIOT® 1776 & 1776C EXTREME CHEMICAL HOSES.

Construction:

Tube: Black EPDM.

Reinforcement: Spiraled high tensile textile cords with flexible steel helix wire.

Cover: Black EPDM – abrasion and ozone resistant.

Working Pressure:

Constant Pressure – 10 Bar (150 PSI)

Service Temperature Range:

-40°F (-40°C) to +212°F (+100°C)

Branding:

ALFAGOMMA – ITALY – T202 10 BAR (150 PSI)
GENERAL PURPOSE EPDM (in green letters)

COUPLING SUGGESTIONS

Quick-Acting, pin lug, short shank couplings or combination nipples attached with single bolt, double bolt, wire or band type clamps.

Nominal Specifications

Series Number	ID (in)	ID (mm)	OD (in)	OD (mm)	Max Rec. WP (psi)	Vacuum HG (in)	Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
T202AA100	1	25	1.38	35	150	30	4	100	0.47
T202AA125	1 1/4	32	1.65	42	150	30	5	100	0.56
T202AA150	1 1/2	38	1.89	48	150	30	6	100	0.64
T202AA200	2	51	2.40	61	150	30	8	100	0.84
T202AA250	2 1/2	63	2.95	75	150	27	10	100	1.20
T202AA300	3	76	3.46	88	150	27	12	100	1.44
T202AA350	3 1/2	90	4.02	102	150	27	14	100	1.82
T202AA400	4	102	4.49	114	150	27	16	100	2.03
T202AA500	5	127	5.55	141	150	24	25	20/50/100	3.18
T202AA600	6	152	6.54	166	150	24	30	20/25/50/100	4.01
T202AA800	8	203	8.70	221	150	21	40	20/25	6.59
T202AA1000	10	254	10.71	272	150	18	50	20	9.03
T202AA1200	12	305	12.87	327	150	18	61	20	12.54