

GROUND COVER - SERIES GC-C™

HEAVY DUTY POLYURETHANE-LINED MATERIAL HANDLING HOSE




General Applications:

- Material handling – heavy duty abrasive
- Mulch, bark, wood chips and other surfacing material delivery
- Soil, seed and compost delivery

Construction: PVC cover with Polyurethane liner and rigid PVC helix.

Service Temperature Range:

-40°F (-40°C) to +150°F (+65°C)*

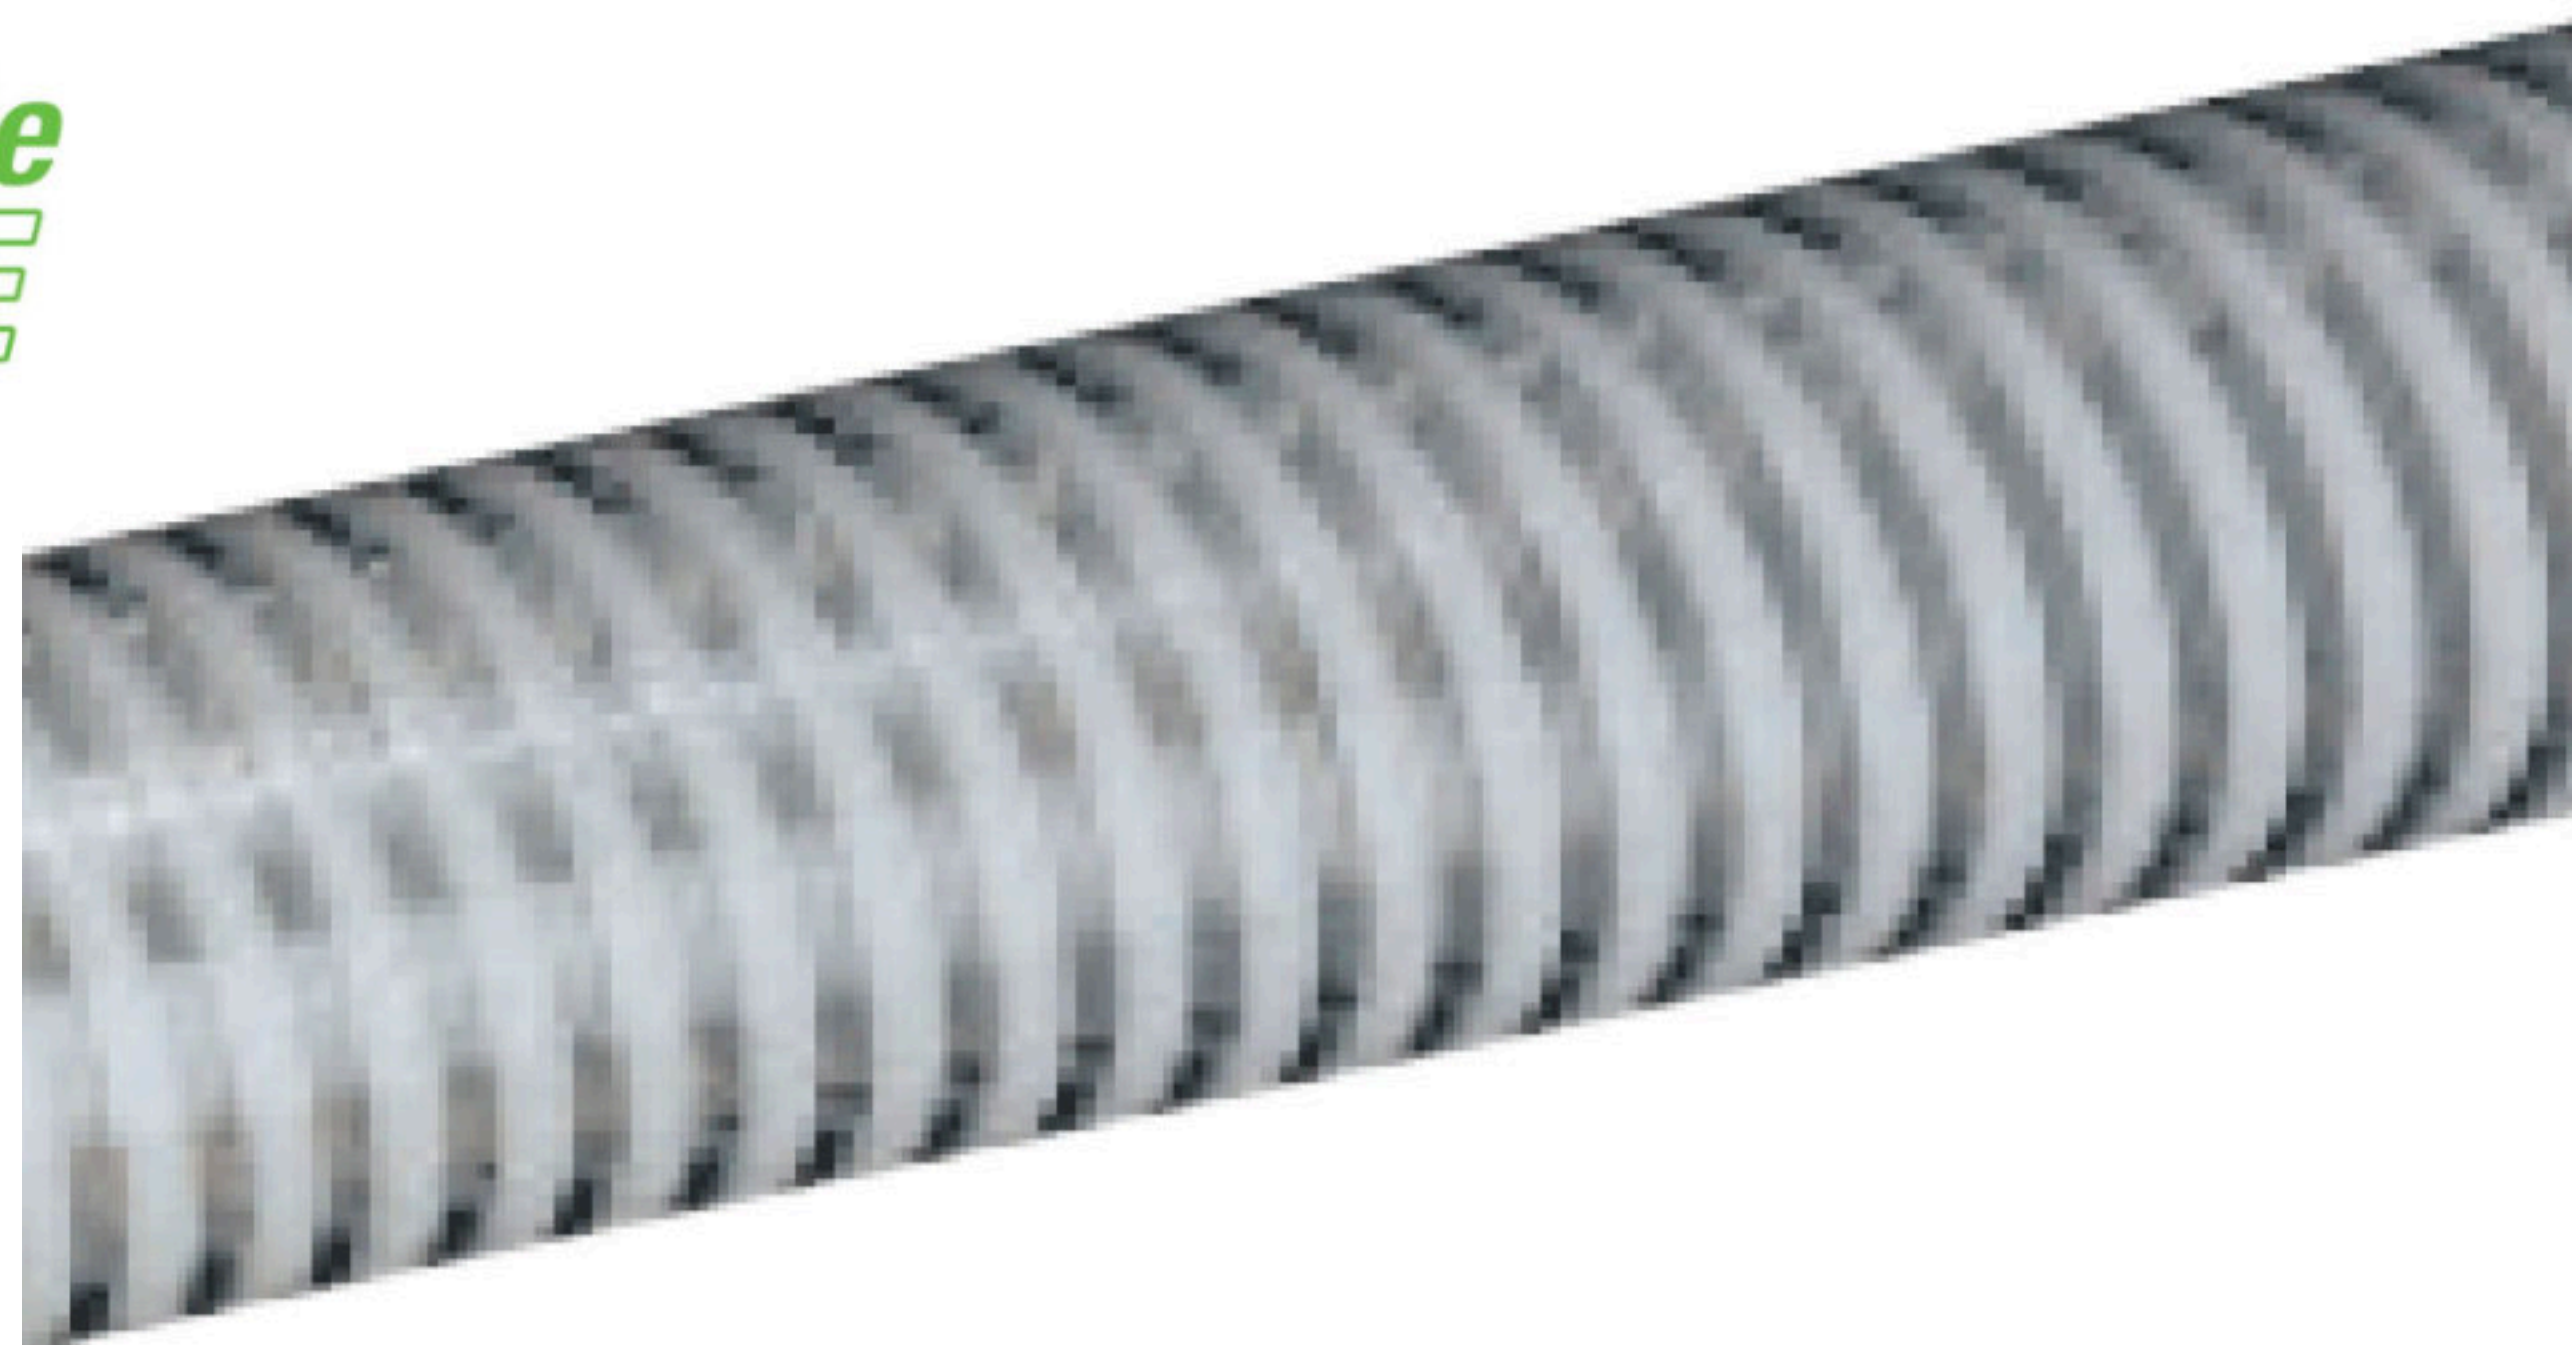

Features and Advantages:

- **Abrasion Resistant Polyurethane Liner** – Designed for dry applications where severe abrasion is a factor. Provides longer hose life and lower operating costs versus rubber or PVC hoses.
- **“Cold-Flex” Materials** – Hose remains flexible in sub-zero temperatures.
- **Phthalate Free**
- **Transparent Construction** – “See-the-flow.” Allows for visual confirmation of material flow.
- **Convuluted Outer Cover** – Provides increased hose flexibility. Allows for easier unwinding and winding on hose reels.
- **Oil Resistant Polyurethane Liner** – Resists most animal and petroleum based oils.

Nominal Specifications

Series Number	ID		OD		Working Pressure (psi)			Vacuum Rating Hg (in)		Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)	68°F	104°F	68°F	104°F				
GC-C400	4	101.6	4.59	116.6	30	15	28	25	6	100	1.00	
GC-C500	5	127.0	5.57	141.5	30	15	25	20	10	100	1.80	

NOTE: Service life may vary depending on operating conditions and type of material being conveyed.

URETHANE