


CONCRETE PUMPING HOSE

HIGH PERFORMANCE STEEL-REINFORCED

THE T740AA SERIES IS A HIGH PERFORMANCE, STEEL-REINFORCED CONCRETE PUMPING HOSE WITH A HIGH WORKING PRESSURE OF 1275 PSI. WITH A SPECIAL, EASY-HANDLING CONSTRUCTION, THIS PRODUCT IS DESIGNED FOR CONCRETE PLACEMENT AT THE CASTING SITE.

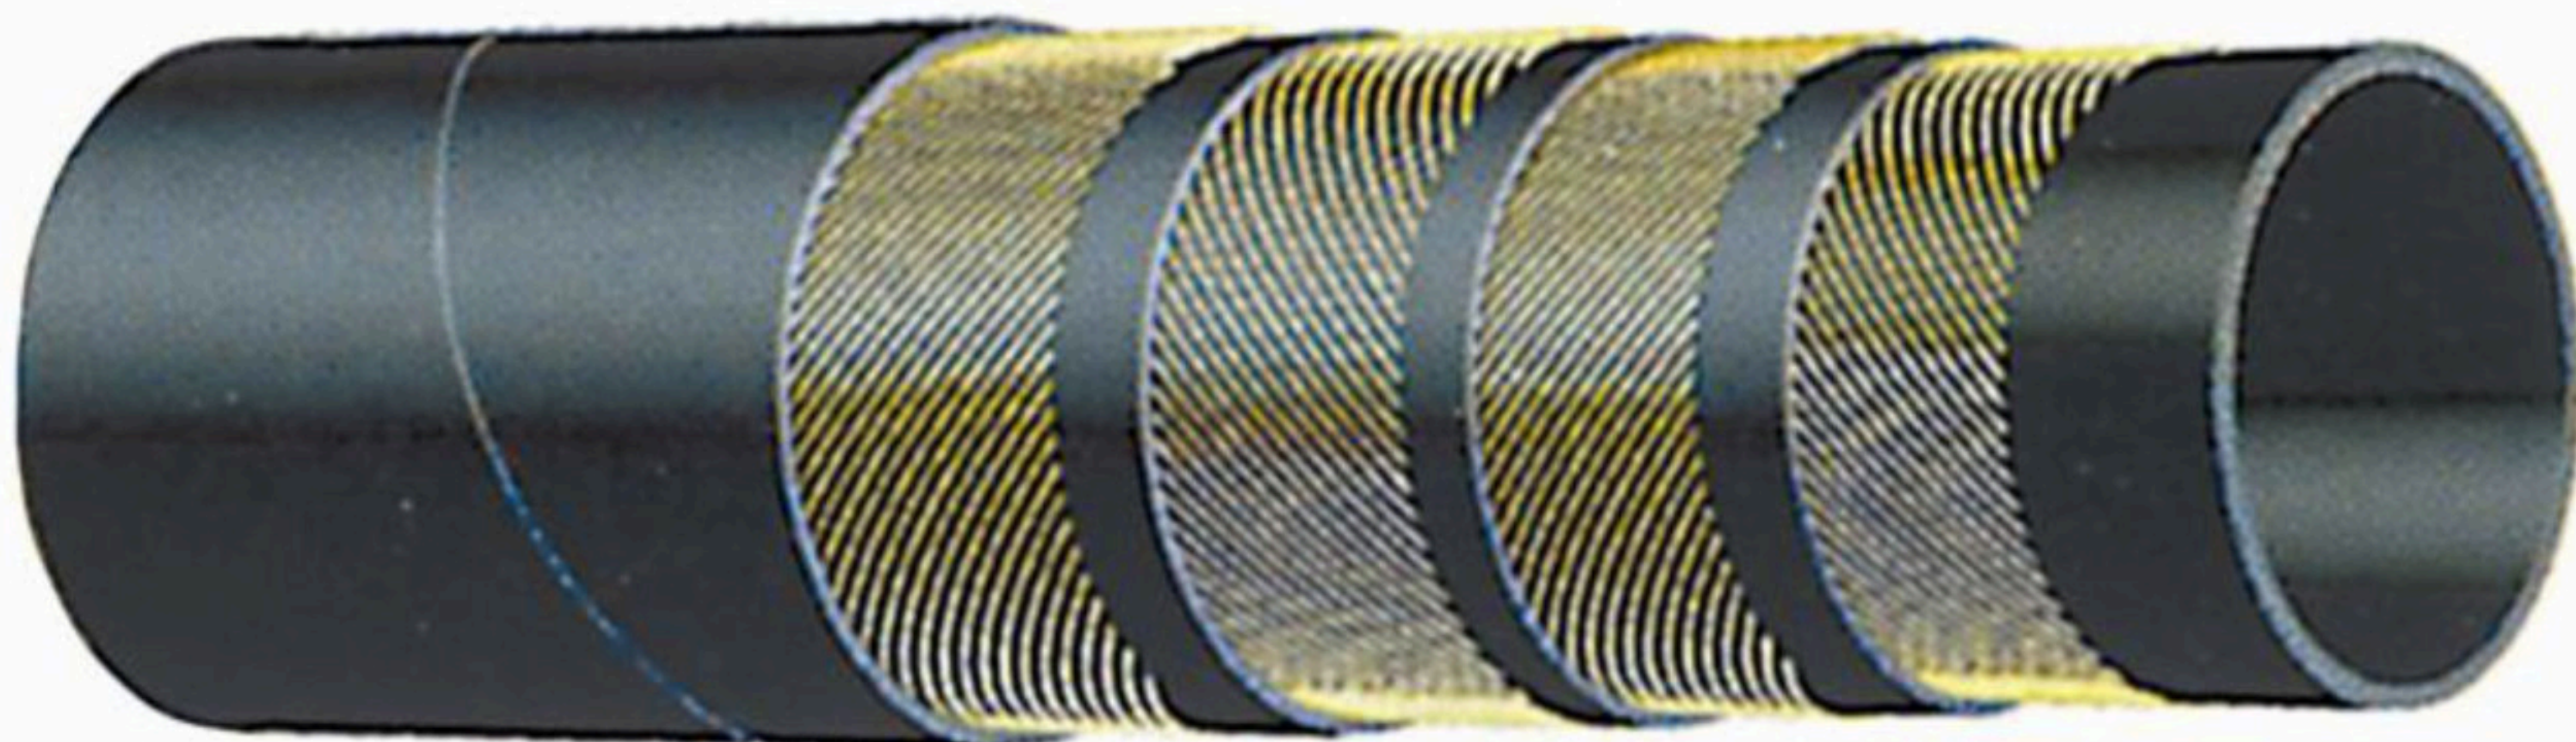

Cover:

Black conductive SBR/NR blend – abrasion and ozone resistant.

Reinforcement:

High tensile steel cords.

Tube:

Black conductive NR – abrasion resistant.

Working Pressure:

Working Pressure – 85 Bar (1275 PSI)

Temperature Range:

-22°F (-30°C) to 176°F (+80°C)

Branding:

ALFAGOMMA – ITALY T740 85 BAR (1275 PSI) W. P. HEAVY DUTY CONCRETE PUMPING (in white letters)

COUPLING SUGGESTIONS

Tubular steel full flow male permanently swaged or internally expanded with ferrule to provide maximum hose coupling compatibility.

Nominal Specifications

Series	ID (in.)	ID (mm)	OD (in.)	OD (mm)	Wall Thickness (mm)	Max Rec. WP (PSI)	Min. Bending Radius (in.)	Weight (lbs./ft.)
T740AA200	2	51	2.72	69	9	1275	10	1.44
T740AA250	2 1/2	63	3.35	85	11	1275	10 1/2	2.25
T740AA300	3	76	3.94	100	12	1275	15	3.06
T740AA400	4	102	5.04	128	13	1275	20	4.72
T740AA500	5	127	6.10	155	14	1275	25	6.95

MATERIAL HANDLING