


225 PSI PREMIUM WASH DOWN PAPER MILL / CREAMERY HOSE - NO NOZZLE

THE T350 SERIES IS SPECIALLY DESIGNED FOR GENERAL WASH DOWN SERVICE, USING HOT WATER OR LOW PRESSURE SATURATED STEAM IN PROCESSING PLANTS AND FACILITIES AND IN FOOD AND DIARY PLANTS.

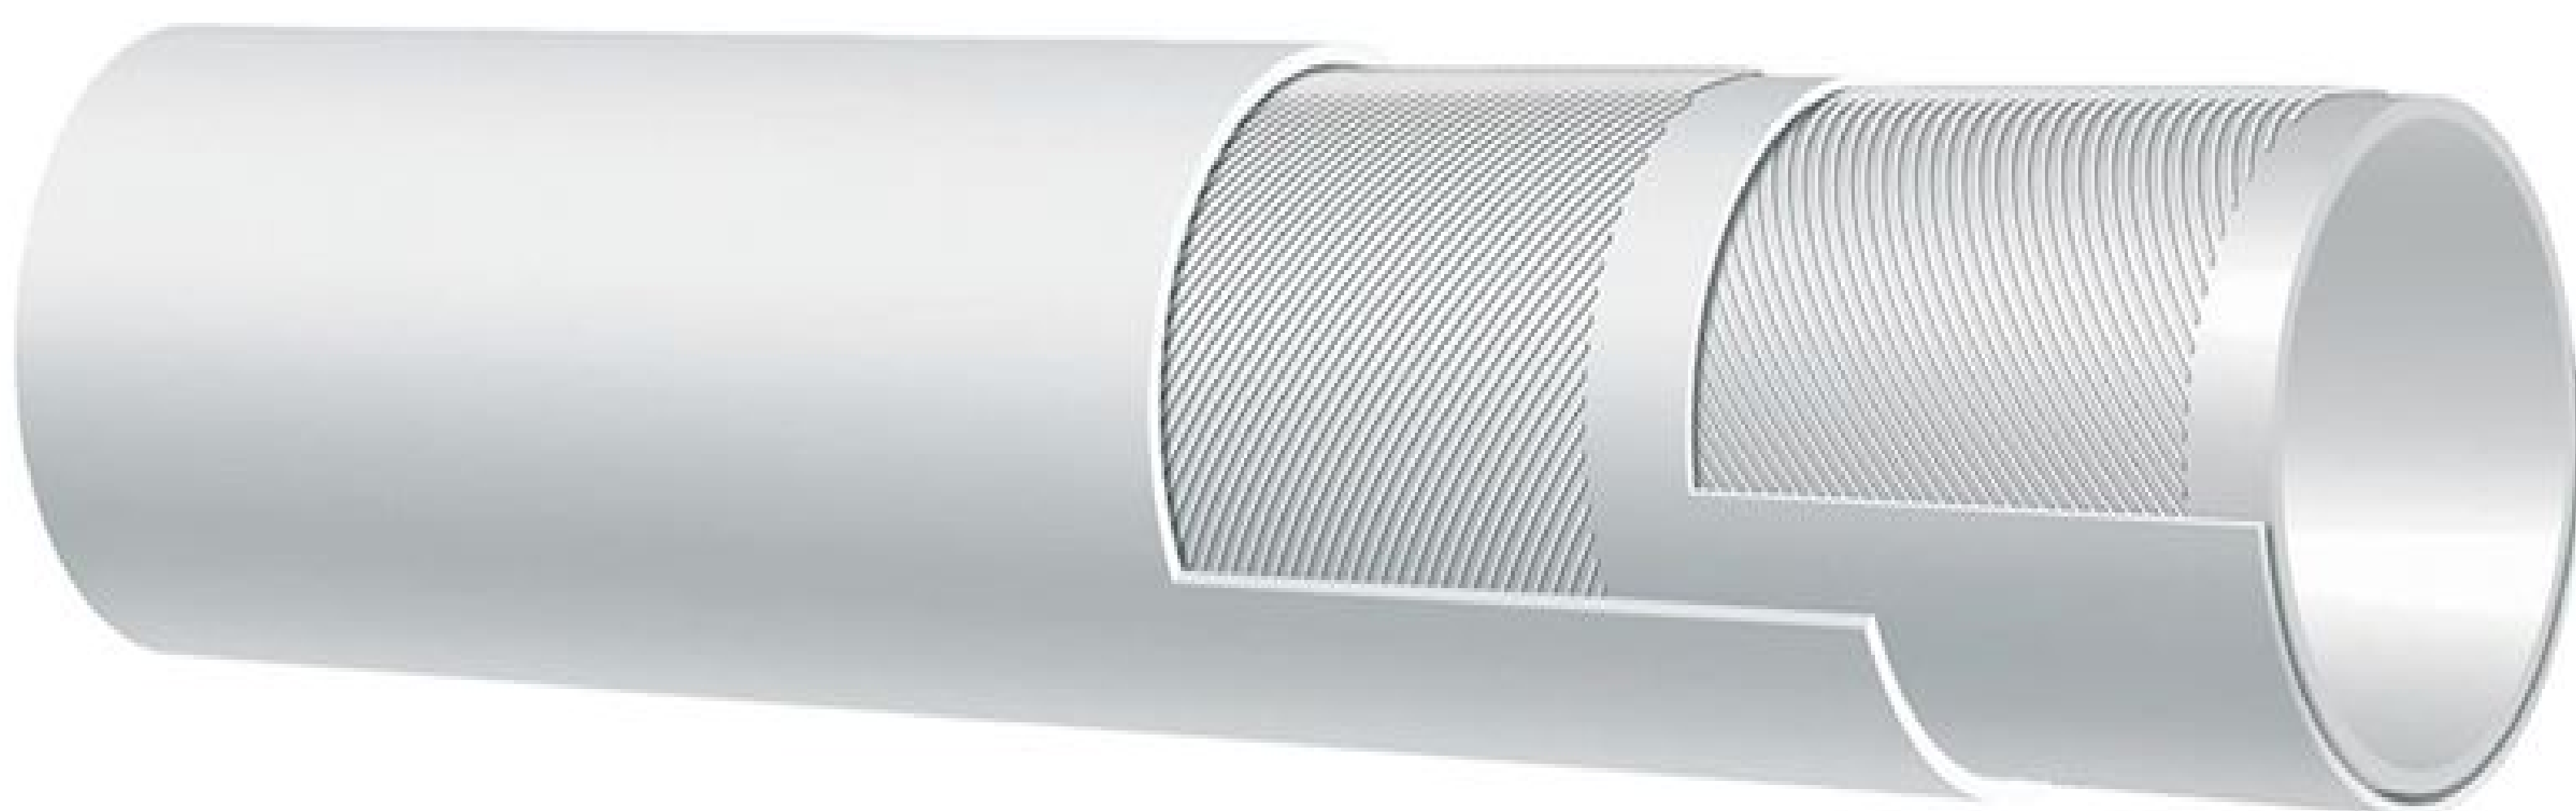

Cover:

Red EPDM – heat, abrasion and ozone resistant.
White EPDM – heat, abrasion and ozone resistant.

Reinforcement:

High tensile textile cords.

Tube:

White EPDM.

Working Pressure:

Constant Pressure – 15 Bar (225 PSI)

Steam Pressure:

Constant Pressure – 6 Bar (90 PSI)

Temperature Range:

-40°F (-40°C) to 330°F (+165°C)

Branding:

ALFAGOMMA – ITALY – T350 6 BAR (90 PSI) STEAM
15 BAR (225 PSI) HOT WATER (embossed)

Nominal Specifications

Series	ID (in.)	ID (mm)	OD (in.)	OD (mm)	Max Rec. WP (PSI)	Weight (lbs./ft.)
T350LL050	1/2	13	0.91	23	225	0.27
T350LL062	5/8	16	1.02	26	225	0.31
T350LL075	3/4	19	1.22	31	225	0.44
T350LL100	1	25	1.46	37	225	0.54
T350LH075	3/4	19	1.22	31	225	0.44
T350LH100	1	25	1.46	37	225	0.54

COUPLING SUGGESTIONS

Short shank, long shank couplings (NPT, GHT), barbed inserts attached with bands.