U.S. HOSE & COUPLING


NAHAD MEMBER
THE ASSOCIATION FOR HOSE AND ACCESSORIES DISTRIBUTION

T605AA SERIES 150 PSI
BLACK PETROLEUM S&D

THE T605AA SERIES IS RATED TO 150 PSI AND WAS DEVELOPED SPECIFICALLY TO HANDLE SUCTION AND DISCHARGE DUTIES ASSOCIATED WITH TRUCK AND TANK CAR TRANSFER OF GASOLINE, OIL AND OTHER PETROLEUM-BASED PRODUCTS (UP TO 50% AROMATIC CONTENT).

NOTE: EXCEEDS SAE 100R4



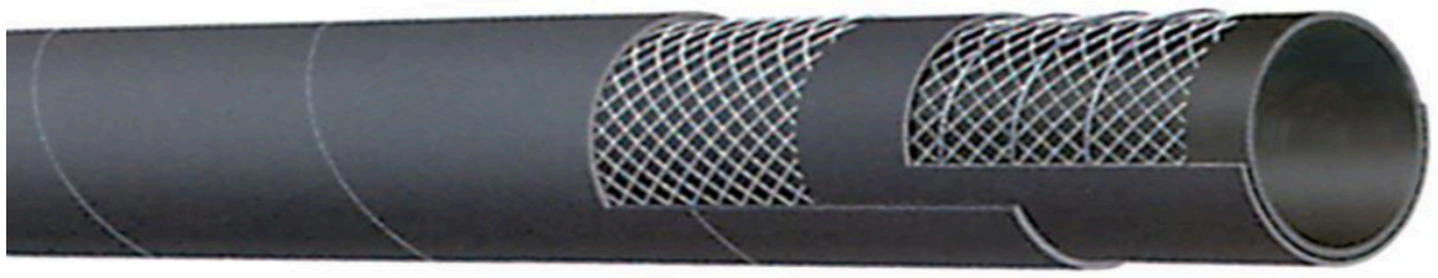

CONSTRUCTION

Tube – Black conductive NBR
Reinforcement – High tensile textile spiral cords with flexible steel helix wire
Cover – Black CR – abrasion, ozone and hydrocarbon resistant

WORKING PRESSURE

Constant Pressure – 10 Bar (150 PSI)

SERVICE TEMPERATURE RANGE

-22°F (-30°C) to +200°F (+93°C).

GENERAL APPLICATIONS

- For suction and discharge applications in truck and tank car transfer of gasoline, oil and other petroleum-based products with up to 50% aromatic content

NOTE: Exceeds SAE100R4

⚠ Not recommended for use on a reel
⚠ Not recommended for gasohol/high additives
ⓘ Diesel #1 or #2 are approved for use

Series Number	ID (in)	ID (mm)	OD (in)	OD (mm)	Max. Working Pressure (psi)	Vacuum Rating Hg (in)	Min. Bending Radius (in) at 68°F	Standard Length (ft)	Weight (lbs/ft)
T605AA075	3/4	19	1.18	30	150	30	1 1/2	100	0.40
T605AA100	1	25	1.42	36	150	30	2	100	0.50
T605AA125	1 1/4	32	1.69	43	150	30	2 1/2	100	0.60
T605AA150	1 1/2	38	1.93	49	150	30	3	100	0.70
T605AA200	2	51	2.44	62	150	30	4	100	0.91
T605AA250	2 1/2	63	2.99	76	150	30	7 1/2	100	1.40
T605AA300	3	76	3.50	89	150	30	9	100	1.59
T605AA400	4	102	4.57	116	150	30	12	100	2.29
T605AA600	6	152	6.69	170	150	25	24	20/100	4.86
T605AA800	8	203	8.86	225	150	25	32	20	7.74

PETROLEUM

2611 Thunderhawk Ct.
Dayton, OH 45414

(800) 344-0150 phone
(937) 454-2086 fax

sales@ushoseco.com
www.USHOSECO.com