


NON-FDA BULK MATERIAL S&D

THE T720AA SERIES BULK MATERIAL HANDLING HOSE IS MADE FOR SUCTION AND DISCHARGE OF WET OR DRY ABRASIVE MATERIALS. THE NON-FDA COMPLIANT TUBE IS DESIGNED FOR GRAINS AND DRY CEMENT.

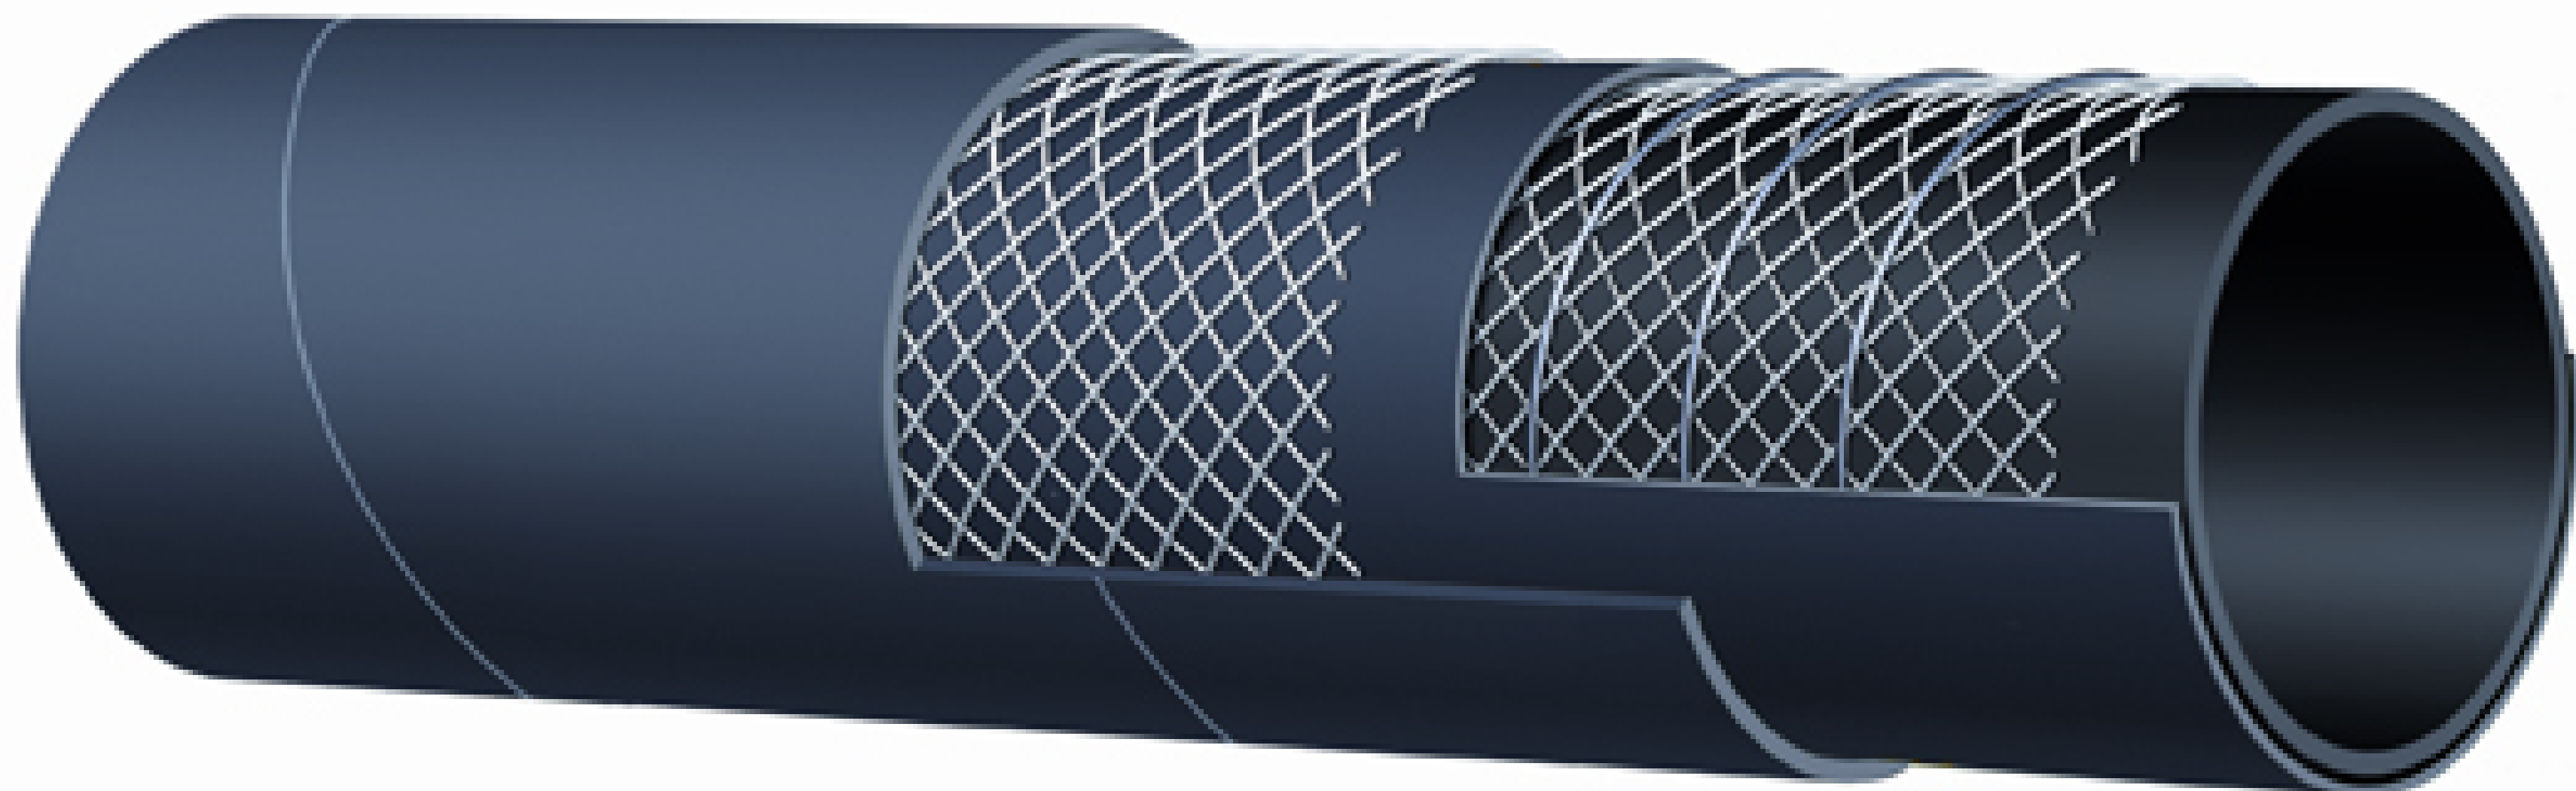

Cover:

Black conductive SBR/NR blend – abrasion and ozone resistant.

Reinforcement:

Spiraled high tensile textile cords with flexible steel helix wire.

Tube:

3/16" black conductive NR – abrasion resistant.

Working Pressure:

Constant Pressure –
10 Bar (150 PSI) for 2", 3", 4"
5 Bar (75 PSI) for 5", 6", 8"

Temperature Range:

-22°F (-30°C) to 176°F (+80°C)

Branding:

ALFAGOMMA – ITALY T720 – BULK MATERIAL – S & D
(in white letters)

COUPLING SUGGESTIONS

Quick-Acting, pin lug, short shank couplings or combination nipples attached with single bolt, double bolt, wire or band type clamps.

Nominal Specifications								
Series	ID (in.)	ID (mm)	OD (in.)	OD (mm)	Max Rec. WP (PSI)	Vacuum HG (in.)	Min. Bending Radius (in. @ 68°F)	Weight (lbs./ft.)
T720AA200	2	51	2.56	65	150	30	6	0.97
T720AA300	3	76	3.54	90	150	27	9	1.54
T720AA400	4	102	4.57	116	150	27	12	2.15
T720AA500	5	127	5.63	143	75	24	20	3.20
T720AA600	6	152	6.61	168	75	24	24	4.01
T720AA800	8	203	8.70	221	75	21	32	6.05

MATERIAL HANDLING

GEORGIA
3400 Town Point Dr.
Suite 130
Kennesaw, GA 30144

OHIO
2611 Thunderhawk Ct.
Dayton, OH 45414

(800) 344-0150 phone
(937) 454-2086 fax
sales@ushoseco.com
www.USHOSECO.com